
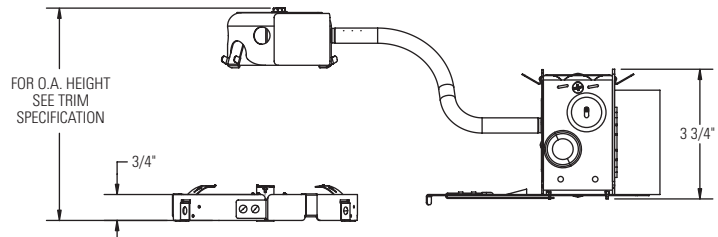
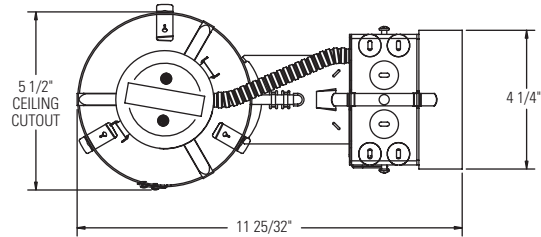


# Performance Recessed CFL Downlighting **1001FRD**

Page 1 of 2

5" Aperture, 1 Light, Compact Fluorescent, Non-IC, Dimming, Remodeler, Frame-In Kit

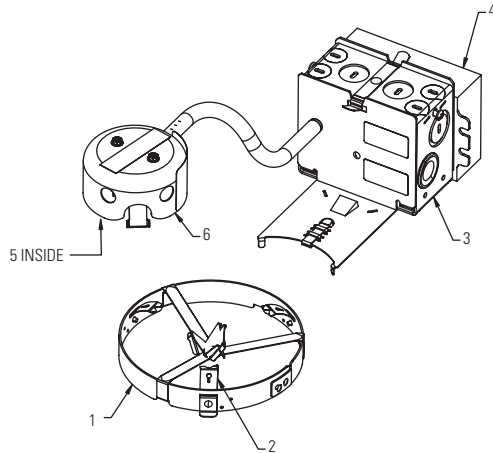

Complete Fixture consists of Frame-In Kit and Reflector Trim. Select each separately.

UniFrame™ Frame-In Kit	UniFrame™ Compact Fluorescent Performance Series Reflector Trims							
	Vertical Open	Vertical Wall Wash - Single	Vertical Wall Wash - Double	Horizontal Open	Horizontal Wall Wash - Single	Horizontal Wet Location Lensed / Diffused		Horizontal Cross Blade
<b>1001FRD26MX1</b> (Advance Mark X-120V) 26W Triple, GX24q-3 Base 120V- 0.26amp max	<b>1001CL</b> <b>1001CD</b> <b>1001WH</b>	<b>1001CLSW</b> <b>1001CDSW</b> <b>1001WHSW</b>	<b>1001CLDW</b> <b>1001CDDW</b> <b>1001WHDW</b>	<b>1001HCL</b> <b>1001HCD</b> <b>1001HWH</b>	<b>1001HCLSW</b> <b>1001HCDSW</b> <b>1001HWHSW</b>	Clear Lens <b>1001HCLC</b> <b>1001HCDC</b> <b>1001HWHC</b>	Fresnel <b>1001HCLF</b> <b>1001HCDF</b> <b>1001HWHF</b>	<b>1001HACB</b> <b>1001HWHCB</b>
<b>1001FRD26MX2</b> (Advance Mark X-277V) 26W Triple, GX24q-3 Base 277V- 0.11amp max						Opal Lens <b>1001HCLO</b> <b>1001HCDO</b> <b>1001HWHO</b>		
<b>Universal Series Reflector Trims</b> (Reference Trim Spec Sheet for Recommended Lamping)								
	Performance Cone	Cone	Wet Location					
	1013CFL 1013CDCFL	1045 1046 1046CD	1024 1078					

## Features

- UniFrame™ Mounting Ring:** .032" (#22ga.) thick Galvanized Steel. Accommodates existing ceilings up to 2" thick. Attaches securely to any type of ceiling material without tools using (3) mounting straps provided. Includes adhesive backed aperture template.
- Trim Clips:** "Push In / Twist Out" clips hold reflector flush to ceiling.
- Junction Box:** 2" x 4" x 3-1/2" (22cu.in.) .032" (#22ga.) galvanized steel. UL Listed for 90° C supply wire. Attaches to mounting ring without tools.
- Ballast:** 120V or 277V UL Listed Electronic Dimming Ballast, 100% to 5% full range continuous dimming. End of lamp life protection, class "P" thermally protected, class "A" sound rating.
- Socket:** Four-pin base, molded thermoplastic socket, prewired with No. 18 AWM leads to ballast.
- Socket Housing:** .036" (#20ga.) Galvanized Steel housing attaches to reflector trim by spring clip for precise optic alignment.

## Labels

**cULus Listed.** Suitable for Damp Locations.

### Job Information

**Type:**

**Job Name:**

**Cat. No.:**

**Lamp(s):**

**Notes:**