




**1132/1102P1 Series**  
Standard Incandescent

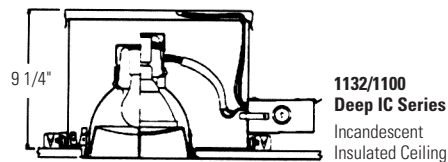

**1132/1100 Deep IC Series**  
Incandescent  
Insulated Ceiling

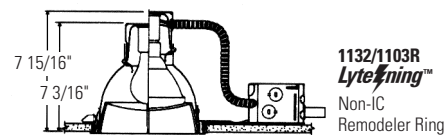

**1132/1103R LyteFining™**  
Non-IC  
Remodeler Ring

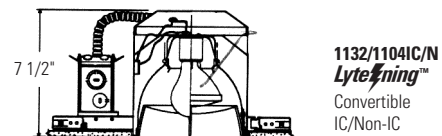

**1132/1104IC/N LyteFining™**  
Convertible  
IC/Non-IC

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Reflector Trim	Frame-In Kit — See Individual Frame-In Kit Specification Sheets							
	LED				Fluorescent			
	Frame-In Kit	Installation Type	Lamping	Height	Frame-In Kit	Ceiling Type	Lamping	Height
1132 Matte White	<b>1101LED</b>	Non-IC	LED	7 3/16"	<b>1101F18U Series</b>	UniFrame™ Non-IC	(1) Triple 18W (GX24q-2)	7 1/16" max.
	<b>1100LEDREM</b>	Non-IC Remodeler	LED	7 3/16"				
	Incandescent				<b>1100FTU Series</b>	Non-IC	(1) Triple 26/32W (GX24q-3)	6 3/4"
	<b>1102P1</b>	Non-IC	100W A19	7 3/16"; 7 15/16"				
	<b>1103R</b>	Non-IC Remodeler	150W PAR38	7 3/16"; 7 15/16"	<b>1101F18ICU/N</b>	Performance IC	(1) Triple 18W (GX24q-2)	7 1/4"
	<b>1100IC</b>	IC	60W A19	7 5/16"				
	<b>1100AICM</b>	AirSeal® IC	75W PAR30	7 5/16"	<b>1104F13ES Series</b>	Airseal® IC	(1) Triple 13W (GX24q-1)	7 1/2"
	<b>1100DICM</b>	Deep IC	60W A19	9 1/4"				
	<b>1100DAICM</b>	Deep AirSeal® IC	90W PAR38	9 1/4"	<b>1104F18ES Series</b>	Airseal® IC	(1) Triple 18W (GX24q-2)	7 1/2"
	<b>1104ICX/N</b>	AirSeal® IC	52W A19 75W PAR30	7 1/4"				
<b>1104IC/N</b>	AirSeal® IC	40W A19	7 1/2"	<b>1910XFH1</b>	Conversion Kit	(1) Quad 13W (GX23-2)	7 3/16"	
<b>1104ICR</b>	IC Remodeler	50W PAR30	7 1/2"					
<b>1104IC/N</b>	Non-IC	60W A19	7 1/2"	<b>1910XDH1</b>	Conversion Kit	(2) Quad 13W (GX23-2)	6 3/4"	
<b>1104ICR</b>	Non-IC Remodeler	75W PAR30	7 1/2"					

## Features

- Reflector:** Hydroformed aluminum, 0.040" minimum thickness; Anobrite® (anodic-processed) semi-specular finish for permanent reflectivity; matte white trim flange.
- Cross Blade:** Die cast aluminum painted matte white or satin aluminum.
- Frame-In Kit:** (1102P1 standard frame shown.) Other frames listed above and shown around. See Frame-In Kit specification sheets for more details.

## Options & Accessories

- Retaining Clips:** 1955 - For installing in existing ceiling
- Extra Wide Flange Trim Ring:** 1957 - 8 5/8" O.D.
- Spread Lens:** L56WWLENS - Proprietary spread lens for use with combination of wall washer optics and LED Frame-In Kits.

## Labels

UL (Suitable for Damp Locations), I.B.E.W.

## Job Information

## Type:

**Job Name:**


**Cat. No.:**

**Lamp(s):**


**Notes:**

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
We reserve the right to change details of design, materials and finish.  
www.lightolier.com © 2011 Philips Group • K1111

### SPACING RATIO = 1.2

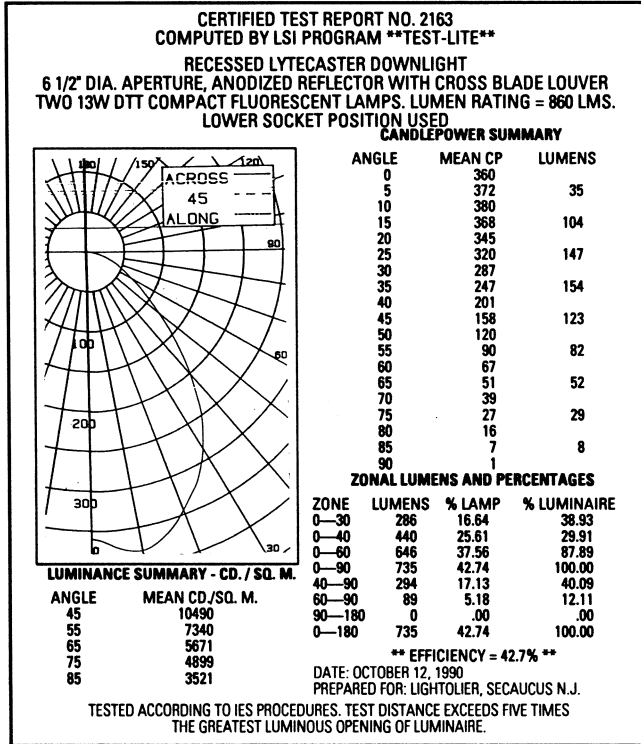

### SPACING RATIO = 0.4

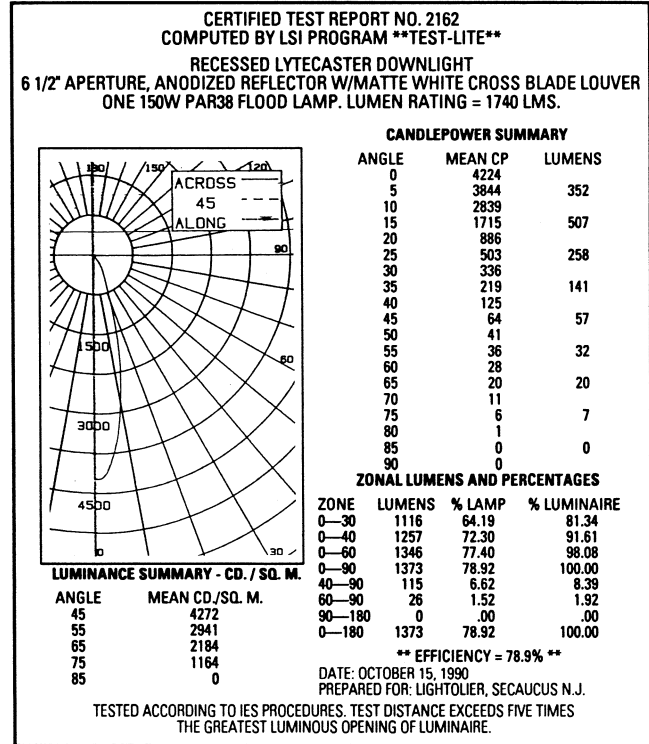

### COEFFICIENTS OF UTILIZATION

% EFFECTIVE CEILING CAVITY REFLECTANCE

ROOM CAVITY RATIO	% WALL REFLECTANCE															
	80			70			50			30			10			0
	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
1	.46	.45	.43	.45	.44	.43	.43	.42	.41	.42	.41	.40	.40	.40	.39	.38
2	.42	.40	.38	.41	.39	.37	.39	.38	.36	.38	.37	.36	.37	.36	.35	.34
3	.38	.35	.33	.37	.35	.33	.36	.34	.32	.35	.33	.32	.34	.32	.31	.30
4	.35	.32	.29	.34	.31	.29	.33	.31	.29	.32	.30	.28	.31	.29	.28	.27
5	.32	.28	.26	.31	.28	.26	.30	.28	.26	.29	.27	.25	.29	.27	.25	.24
6	.29	.26	.23	.28	.25	.23	.28	.25	.23	.27	.25	.23	.26	.24	.23	.22
7	.26	.23	.21	.26	.23	.21	.25	.23	.21	.25	.22	.20	.24	.22	.20	.20
8	.24	.21	.19	.24	.21	.19	.23	.21	.19	.23	.20	.18	.22	.20	.18	.18
9	.22	.19	.17	.22	.19	.17	.21	.19	.17	.21	.18	.17	.21	.18	.17	.16
10	.20	.17	.15	.20	.17	.15	.20	.17	.15	.20	.17	.15	.20	.17	.15	.14

20% FLOOR CAVITY REFLECTANCE

Conversion Factors: 1 Lt. 13W Quad Tube, C.U. x 1.0. 100W A19, C.U. x 1.25.

### COEFFICIENTS OF UTILIZATION

% EFFECTIVE CEILING CAVITY REFLECTANCE

ROOM CAVITY RATIO	% WALL REFLECTANCE															
	80			70			50			30			10			0
	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
1	.89	.87	.86	.87	.86	.85	.84	.83	.82	.81	.80	.80	.79	.78	.77	.76
2	.85	.82	.80	.83	.81	.79	.81	.79	.77	.79	.77	.76	.77	.75	.74	.73
3	.81	.78	.76	.80	.77	.75	.78	.76	.74	.76	.74	.73	.75	.73	.72	.71
4	.78	.74	.72	.77	.74	.71	.75	.73	.71	.74	.72	.70	.72	.71	.69	.68
5	.74	.71	.68	.74	.70	.68	.72	.70	.68	.71	.69	.67	.70	.68	.66	.66
6	.72	.68	.66	.71	.68	.66	.70	.67	.65	.69	.67	.65	.68	.66	.64	.64
7	.69	.66	.63	.69	.65	.63	.68	.65	.63	.67	.64	.62	.66	.64	.62	.61
8	.67	.63	.61	.66	.63	.61	.65	.63	.61	.65	.62	.60	.64	.62	.60	.59
9	.65	.61	.59	.64	.61	.59	.64	.61	.59	.63	.60	.58	.62	.60	.58	.57
10	.62	.58	.57	.62	.59	.57	.62	.59	.57	.61	.58	.56	.61	.58	.56	.56

20% FLOOR CAVITY REFLECTANCE

Conversion Factor: 75W PAR30 FL, C.U. x 1.0.

To convert lighting data for a lower wattage incandescent lamp of the same type, multiply the footcandle (or candlepower) values by the ration of the lumens of the two lamps. The coefficients of utilization remain the same.

### Job Information

### Type:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
We reserve the right to change details of design, materials and finish.  
www.lightolier.com © 2011 Philips Group • K1111