




**1170M1/1100 DEEP IC Series**  
Incandescent Insulated Ceiling

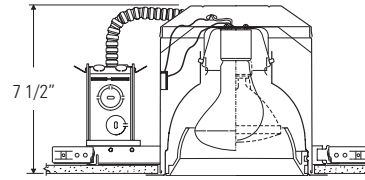

**1170M1/1104IC/N**  
**LyteSeal™** IC/Non-IC  
Convertible

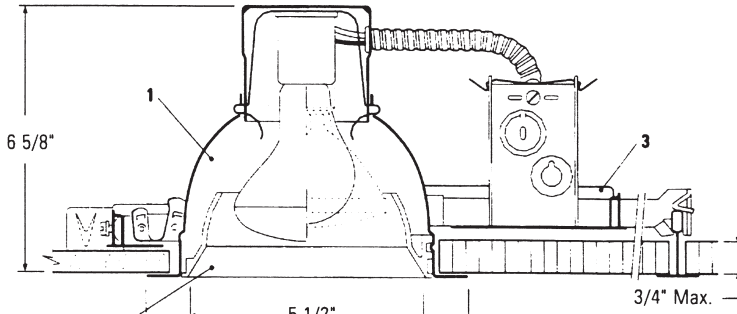

**1170M1/1102P1**  
Standard Incandescent

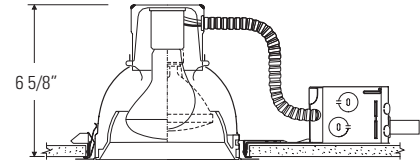

**1170M1/1103R**  
**LyteSeal™** Non-IC  
Remodeler Ring

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Reflector Trim	Frame-In Kit — See Individual Frame-In Kit Specification Sheets							
	Incandescent				Fluorescent			
	Frame-In Kit	Ceiling Type	Lamping	Height	Frame-In Kit	Ceiling Type	Lamping	Height
1170M1 Basic White	<b>1102P1</b>	Non-IC	75W A19, PAR30*	6 5/8"	<b>1104F13 Series</b>	IC	(1) Quad/Triple 13W (GX24q-1)	7 1/2"
	<b>1103R</b>	Non-IC Remodeler	85W BR30	6 5/8"	<b>1104F18** Series</b>	IC	(1) Quad/Triple 18W (GX24q-2)	7 1/2"
	<b>1100IC</b>	IC	75W PAR30	7 5/16"	<b>1104F26** Series</b>	IC	(1) Quad/Triple 26W (GX24q-3)	7 1/2"
	<b>1100AICM</b>	AirSeal® IC	85W BR30	7 5/16"	<b>1100FTU Series</b>	Non-IC	(1) Triple 26/32W (GX24q-3)	6 5/8"
	<b>1104IC/N</b>	AirSeal® IC	90W PAR38†*	7 1/2"	<b>1100AICMFT</b>	AirSeal®-IC	(1) Triple 26/32W (GX24q-3)	6 7/8"
	<b>1104ICR</b>	IC Remodeler		7 1/2"	<b>1910XDH1</b>	Conversion Kit	(2) Quad 13W (GX23-2)	6 5/8"
	<b>1104ICX/N</b>	AirSeal®-IC		7 1/4"	<b>1910XFH1</b>	Conversion Kit	(1) Quad 13W (GX23-2)	6 5/8"
	<b>1100DICM</b>	Deep IC	75W PAR30*	9 1/2"				
	<b>1100DAICM</b>	Deep AirSeal®-IC	85W BR30	9 1/2"				
	<b>1104IC/N</b>	Non-IC	75W PAR30	7 1/2"				
	<b>1104ICR</b>	Non-IC Remodeler	85W BR30	7 1/2"				

\* Use Socket Extender 1968 For Short Neck PAR30.  
\*\* Lightolier recommends the use of triple tube lamps

### Features

- Reflector:** Hydroformed aluminum, .040" thick (18 ga.) ; non-yellowing, scuff-resistant Perma White finish with 88% reflectance; white trim flange.
- Cone:** Injection molded high temperature opaque white polymer.
- Frame-In Kit:** (1102P1 standard frame shown). Other frames listed above and shown on the right. See Frame-In Kit specification sheets for more details.

### Accessories

**Medium Base Socket Extender: 1968** - For short neck Par30 lamp

### Labels


UL (Suitable for Damp Locations), I.B.E.W.

Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	


Lightolier a Genlyte company www.lightolier.com  
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
We reserve the right to change details of design, materials and finish.  
© 2011 Genlyte Group LLC • G07811



SPACING RATIO = 0.9

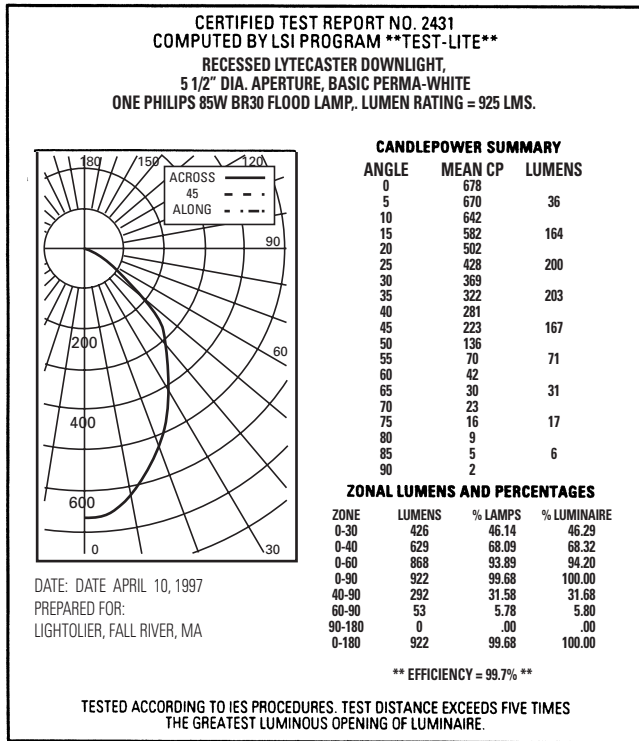

SPACING RATIO = 0.7

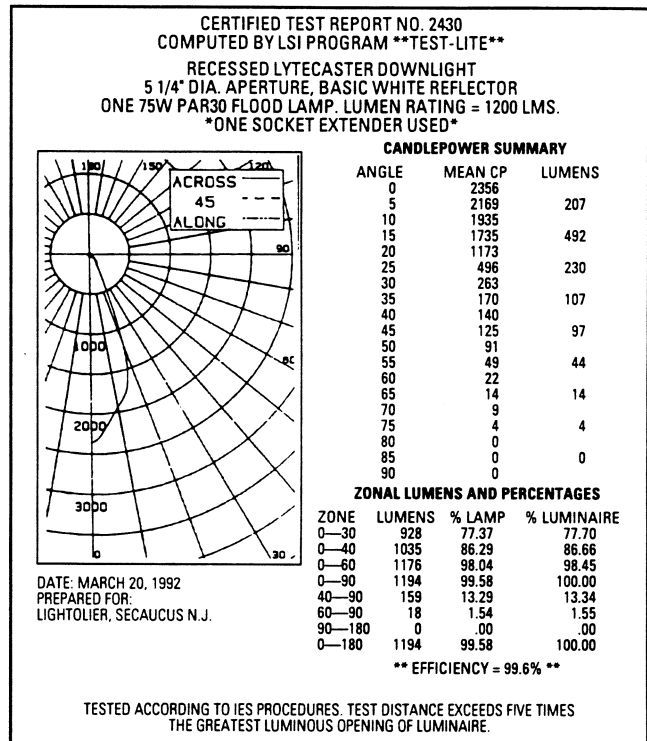

**COEFFICIENTS OF UTILIZATION**

% EFFECTIVE CEILING CAVITY REFLECTANCE

ROOM CAVITY RATIO	% WALL REFLECTANCE																			
	80				70				50				30				10			
	50	30	10	0	50	30	10	0	50	30	10	0	50	30	10	0	50	30	10	0
1	1.09	1.06	1.04	1.07	1.04	1.02	1.03	1.01	.99	.99	.97	.96	.96	.94	.93	.91				
2	1.00	.96	.92	.99	.94	.91	.95	.92	.89	.92	.90	.87	.90	.87	.85	.83				
3	.92	.87	.82	.91	.86	.82	.88	.84	.80	.86	.82	.79	.83	.80	.78	.76				
4	.85	.79	.74	.84	.79	.74	.82	.77	.73	.80	.76	.72	.78	.74	.71	.70				
5	.79	.72	.67	.78	.71	.67	.76	.70	.66	.74	.69	.66	.73	.69	.65	.64				
6	.73	.66	.61	.72	.66	.61	.70	.65	.61	.69	.64	.60	.68	.63	.60	.58				
7	.67	.60	.56	.66	.60	.55	.65	.59	.55	.63	.58	.54	.62	.58	.54	.53				
8	.62	.55	.51	.61	.55	.50	.60	.54	.50	.59	.54	.50	.58	.53	.50	.48				
9	.57	.51	.46	.57	.50	.46	.56	.50	.46	.55	.49	.45	.54	.49	.44	.44				
10	.53	.46	.42	.52	.46	.42	.51	.46	.42	.51	.45	.41	.50	.45	.41	.40				

20% FLOOR CAVITY REFLECTANCE

Conversion Factors: 2 Lt. 13W Quad Tube, C. U. x 0.40, 1 Lt. 13W Qyad Tube, C. U. x 0.45, 75W A19, C. U. x 0.50.

**COEFFICIENTS OF UTILIZATION**

% EFFECTIVE CEILING CAVITY REFLECTANCE

ROOM CAVITY RATIO	% WALL REFLECTANCE																							
	80				70				50				30				10				0			
	50	30	10	0	50	30	10	0	50	30	10	0	50	30	10	0	50	30	10	0	50	30	10	0
1	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	1.00	.99	.98	.97	.95								
2	1.06	1.03	1.00	1.04	1.01	.99	1.01	.99	.97	.98	.96	.95	.96	.94	.93	.91								
3	1.01	.97	.94	.99	.96	.93	.97	.94	.92	.95	.92	.90	.93	.91	.89	.88								
4	.96	.92	.89	.95	.91	.88	.93	.90	.87	.91	.88	.86	.89	.87	.85	.84								
5	.92	.87	.84	.91	.87	.83	.89	.86	.83	.88	.84	.82	.86	.84	.81	.80								
6	.88	.83	.80	.87	.83	.80	.86	.82	.79	.85	.81	.79	.84	.81	.78	.77								
7	.84	.80	.76	.84	.79	.76	.82	.78	.76	.81	.78	.75	.80	.77	.75	.74								
8	.81	.76	.73	.80	.76	.73	.79	.75	.73	.78	.75	.72	.78	.74	.72	.71								
9	.78	.73	.70	.77	.73	.70	.76	.72	.70	.76	.72	.69	.75	.72	.69	.68								
10	.75	.70	.67	.75	.70	.67	.74	.70	.67	.73	.69	.67	.73	.69	.67	.66								

20% FLOOR CAVITY REFLECTANCE

To convert lighting data for a lower wattage incandescent lamp of the same type, multiply the footcandle (or candlepower) values by the ratio of the lumens of the two lamps. The coefficients of utilization remain the same.

**Job Information** **Type:**

Lightolier a Genlyte company [www.lightolier.com](http://www.lightolier.com)  
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 © 2011 Genlyte Group LLC • G0711