

Complete Fixture consists of Frame-In Kit and Reflector Trim. Select each separately.

| Reflector Trims | | Frame-In Kits (See Individual Frame-In Kit Specification Sheets) | | |
|------------------|---------------------------|---|-------------------|--------------------------|
| Catalog No. | Description | Catalog No. | Installation Type | Lamping |
| 1027HID | Black Baffle Adjustable | 1001HIDP20U | 7" Non-IC | 20W PAR20/30L Ceramic MH |
| 1027WHHID | White Baffle Adjustable | | | 22W PAR20/30L Ceramic MH |
| 1027CDHID | Clear Diffuse Adjustable | 1001HIDP39U | 7" Non-IC | 39W PAR20/30L Ceramic MH |
| 1048HID | Specular Clear Adjustable | | | |

Features

- 1. Reflector:** Hydroformed aluminum, .040" thick, (18 ga.); Matte white trim flange.
- 2. Aperture:** Aluminum cone or Step Baffle, painted or anodized finish.
- 3. Lampholder Assembly:** 4KV Pulse Rated lamp holder with mechanical fastened Male adapter, Provides 358° horizontal rotation and 0° to 35° vertical tilt adjustment.
- 4. Frame-In Kit:** 1001HIDP Series Frame Shown. See Frame-In Kit specification sheets for more details. (Note: Not compatible with LC)

Options & Accessories


- Retaining Clips:** 1955 - Existing Ceiling up to 1" thick
Extra Wide Flange Trim Ring: 1957 - 7" O.D.
Extra Thick Ceiling Mounting Ring: 1967B - up to 2" thick ceiling

Labels

UL (Suitable for Damp Locations) I.B.E.W.

| Job Information | Type: |
|------------------|-------|
| Job Name: | |
| Cat. No.: | |
| Lamp(s): | |
| Notes: | |

39W PAR 20 CERAMIC MH - SPOT, LAMP LUMENS 2000 LMS, MAX CBCP 13433, AIMED AT MAX TILT, BEAM ANGLE 11°

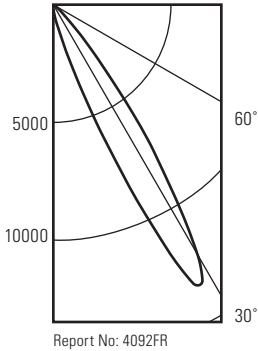


Report No: 4092FR

| Candlepower Distribution Angle | 0° CP |
|--------------------------------|-------|
| 0 | 208 |
| 5 | 334 |
| 10 | 778 |
| 15 | 1893 |
| 20 | 5255 |
| 25 | 11490 |
| 30 | 12251 |
| 35 | 7026 |
| 40 | 2674 |
| 45 | 845 |
| 50 | 334 |
| 55 | 207 |
| 60 | 85 |
| 65 | 12 |
| 70 | 12 |
| 75 | 12 |
| 80 | 12 |
| 85 | 0 |
| 90 | 0 |

| D | C | FC | L | W |
|---|------|-----|------|------|
| Footcandles at Center Beam Aimed at Horizontal Surface | | | | |
| D | C | FC | L | W |
| 8' | 4.2' | 146 | 2.0' | 1.7' |
| 10' | 5.2' | 94 | 2.5' | 2.2' |
| 12' | 6.2' | 65 | 2.9' | 2.6' |
| 14' | 7.3' | 48 | 3.4' | 3.0' |

| D | C | FC | L | W |
|---|-------|-----|------|------|
| Footcandles at Center Beam Aimed at Horizontal Surface | | | | |
| D | C | FC | L | W |
| 3' | 5.8' | 147 | 2.8' | 1.3' |
| 4' | 7.7' | 83 | 3.7' | 1.7' |
| 5' | 9.6' | 53 | 4.7' | 2.1' |
| 6' | 11.5' | 37 | 5.6' | 2.5' |

39W PAR 20 CERAMIC MH - FLOOD, LAMP LUMENS 2000 LMS, MAX CBCP 5479, AIMED AT MAX TILT, BEAM ANGLE 25°



Report No: 4091FR

| Candlepower Distribution Angle | 0° CP |
|--------------------------------|-------|
| 0 | 381 |
| 5 | 790 |
| 10 | 1675 |
| 15 | 3281 |
| 20 | 4645 |
| 25 | 5328 |
| 30 | 5328 |
| 35 | 4507 |
| 40 | 2985 |
| 45 | 1380 |
| 50 | 526 |
| 55 | 209 |
| 60 | 83 |
| 65 | 30 |
| 70 | 6 |
| 75 | 15 |
| 80 | 15 |
| 85 | 4 |
| 90 | 4 |

| D | C | FC | L | W |
|---|------|----|------|------|
| Footcandles at Center Beam Aimed at Horizontal Surface | | | | |
| D | C | FC | L | W |
| 8' | 4.2' | 60 | 4.4' | 3.8' |
| 10' | 5.2' | 38 | 5.5' | 4.8' |
| 12' | 6.2' | 27 | 6.6' | 5.8' |
| 14' | 7.3' | 20 | 7.7' | 6.7' |

| D | C | FC | L | W |
|---|------|-----|-------|------|
| Footcandles at Center Beam Aimed at Horizontal Surface | | | | |
| D | C | FC | L | W |
| 3' | 3.8' | 135 | 4.8' | 1.8' |
| 4' | 5.8' | 60 | 7.2' | 2.8' |
| 5' | 7.7' | 34 | 9.6' | 3.7' |
| 6' | 9.6' | 22 | 12.0' | 4.6' |

Job Information Type: