




LW Series LED Exit Sign for Wet Locations **LW**

The LW Series is a vandal proof die cast aluminum exit sign that is UL listed for wet location areas. All electronics are contained within the exit frame for low profile mounting.

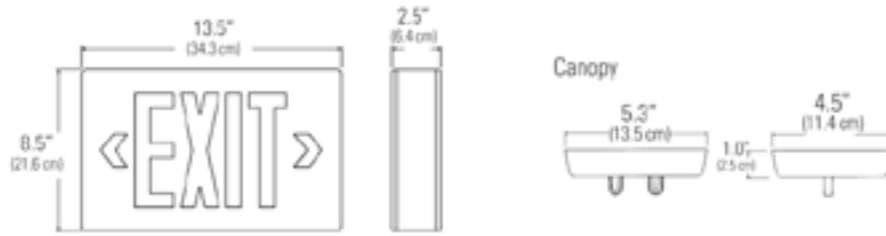

Complete Fixture consists of base exit sign. Select options and accessories below.

How to Specify:



SERIES

LW = Wet Location
Vandal Proof
Die Cast
Aluminum Exit



BATTERY

N = Nickel Cadmium
A = AC Only



**STENCIL
FACES**

1 = Single
2 = Double



**LETTER
COLOR**

R = Red
G = Green



**ARROW
DIRECTION**

3 = No Arrow
4 = Right Arrow
5 = Left Arrow
6 = Double Arrow
7 = Both Right &
Left Arrows



**STENCIL FACE/
HOUSING COLOR**

B = Black
W = White

Features

- 1. Illumination:** Illumination is accomplished with long lasting, high output Light Emitting Diodes (LEDs). LEDs and support electronics have an expected life of 25 years.
- 2. Housing:** Constructed of die cast aluminum with NFPA-type chevrons. Housing and stencil face castings are available with durable epoxy-based powder coat paint finishes. The LW Series includes tamper resistant hardware and a .08" thick polycarbonate protective lens mounted outside the exit stencil.
- 3. Electronics:** 120/277 VAC dual voltage input with surge-protected, solid-state circuitry. Charging system is complete with low voltage disconnect, AC lockout, brownout protection, AC indicator lamp and test switch.
- 4. Battery:** Maintenance free, sealed nickel cadmium battery has an estimated service life of 10 years, and an operating temperature range of 20°F (-7°C) to 95°F (35°C).
- 5. Input Power Requirements:** AC Only - Red: .89 W; Green: 2.64 W
Emergency Operation - Red: 3.62 W; Green: 3.04 W
- 6. Warranty:** Electronics: 3 years, Battery: 5 year full, 5 years pro-rata

Code Compliance

UL 924 listed.

Options

- ST** = Special Input Transformer (Specify voltage & frequency)
- FA** = 24 VDC Fire Alarm Interface (reg. constant DC voltage)
- FL** = Flasher (Emergency operation only)
- 2CKT1** = 120 VAC Two Circuit
- 2CKT2** = 277 VAC Two Circuit

Multiple option configurations may void UL listing. Consult factory for specifics.

Accessories

- T15TPTOOL** = Tamperproof Screwdriver

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

LIGHTOLIER