
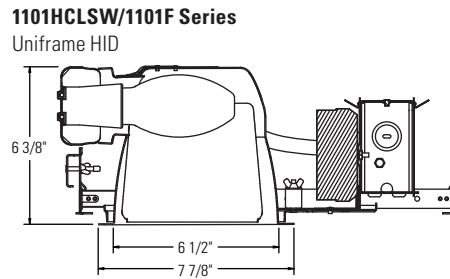


Lytecaster Performance Recessed Downlighting **1101HSW**

Page 1 of 3

6 3/4" Aperture Horizontal Wall Wash, Performance Series, Reflector Trim

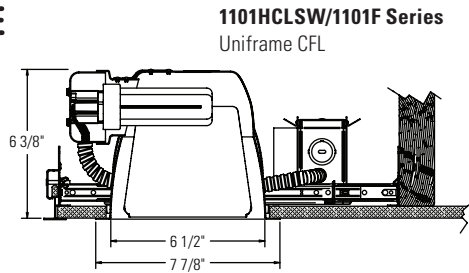

Complete Fixture consists of Frame-In Kit and Reflector Trim. Select each separately.

Uniframe Performance Series Reflector Trims		Compatible Compact Fluorescent Frame-In Kits (See Individual Frame-In Kit Specification Sheets)		
Catalog No.	Description	Catalog No.	Installation Type	Lamping
1101HCLSW 1101HCDSW 1101HWHSW*	6-3/4" Horizontal Single Wall Wash – Specular Clear 6-3/4" Horizontal Single Wall Wash – Clear Diffuse 6-3/4" Horizontal Single Wall Wash – Matte White	1101F18U	Uniframe Non-IC 120/277v	18w Quad/Triple
		1101FR18U	Uniframe Non-IC Remodeler 120/277v	
		1101FD26L1	Uniframe Non-IC Lutron Dimming 120v	26w Quad/Triple
		1101FD26L2	Uniframe Non-IC Lutron Dimming 277v	
		1101FD32L1	Uniframe Non-IC Lutron Dimming 120v	32w Triple
		1101FD32L2	Uniframe Non-IC Lutron Dimming 277v	
		1101F2642U	Uniframe Non-IC 120/277v	26w Quad/Triple
		1101FR2642U	Uniframe Non-IC Remodeler 120/277v	32w Triple
		1101F2642UEM	Uniframe Non-IC Emergency 120/277v	42w Triple
		1101FD2642MX1	Uniframe Non-IC Advance Mark10 Dimming 120v	
		1101FD2642MX2	Uniframe Non-IC Advance Mark10 Dimming 277v	
		1101FD2642M7U	Uniframe Non-IC Advance Mark7 Dimming 120/277v	
		1101FR264MX1	Uniframe Non-IC Advance Mark10 Dimming 120v Rem.	
		1101FR264MX2	Uniframe Non-IC Advance Mark10 Dimming 277v Rem.	
		1101F18ICU/N	Performance IC 120/277v	18w Quad/Triple
1101F2642ICU	Performance IC 120/277v	26w Quad/Triple		
1101F2642IUN		32w Triple		
1101FDICMX1/N	Performance IC Advance Mark10 Dimming 120v	32w Triple		
1101FDICMX2/N	Performance IC Advance Mark10 Dimming 277v	26w Quad/Triple		
		32w Triple		
		Compatible HID Uniframe Frame-In Kits (See Individual Frame-In Kit Specification Sheets)		
		1101HIDED50U	Non-IC	50W ED17 Open
		1101HIDED70U	Non-IC	70W ED17 Open
		1101HIDED100U	Non-IC	100W ED17 Open

*Not listed for HID

Features

- Reflector:** Formed aluminum. Matte White flange.
- Finishes:** CL = Specular Clear (Iridescent Free coating)
CD = Clear Diffuse
WH = Matte White Paint
- Wall Wash Kick Reflector:** Formed aluminum. Clear finish.
- Performance Data:** 60° Cutoff angle.
See attached photometric reports for distribution and efficiency data.
Go to www.lightolier.com for .IES files.

Labels

cULus Listed. Suitable for Damp Locations. I.B.E.W.

Job Information

Type:

Job Name:


Cat. No.:

Lamp(s):

Notes:

Lighting Data

Footcandles On Wall: Multiple Units

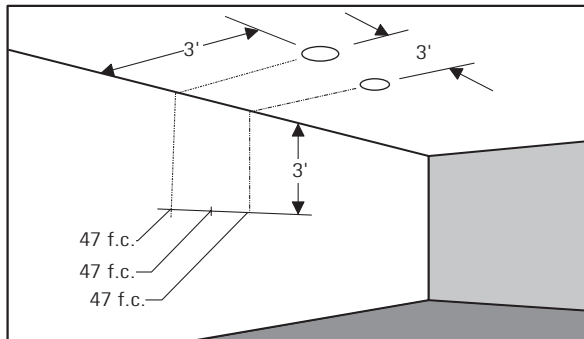

EXAMPLE: 42w with multiple clear reflector units located 3' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 47 f.c. beneath units and 47 f.c. between units.

42w G.E. Triple Biax 3' From Wall-3' On Center 4' From Wall-4' On Center				
	3'		4'	
Distance From Ceiling in Feet	1	2	1	2
1	22	20	22	
2	47	48	47	
3	47	47	47	
4	35	34	35	
5	28	28	28	
6	22	22	22	
7	17	17	17	
8	14	14	14	
9	11	11	11	

32w G.E. Triple Biax 3' From Wall-3' On Center 4' From Wall-4' On Center				
	3'		4'	
Distance From Ceiling in Feet	1	2	1	2
1	17	14	17	
2	35	36	35	
3	37	36	37	
4	28	28	28	
5	22	22	22	
6	18	18	18	
7	14	14	14	
8	11	11	11	
9	9	9	9	

26w G.E. Triple Biax 2' From Wall-2' On Center 3' From Wall-3' On Center				
	2'		3'	
Distance From Ceiling in Feet	1	2	1	2
1	49	44	49	
2	64	62	64	
3	43	43	43	
4	30	30	30	
5	21	22	21	
6	16	16	16	
7	11	11	11	
8	9	9	9	
9	7	7	7	

26w Sylvania Quad Tube 2' From Wall-2' On Center 3' From Wall-3' On Center				
	2'		3'	
Distance From Ceiling in Feet	1	2	1	2
1	39	36	39	
2	49	53	49	
3	36	34	36	
4	25	25	25	
5	18	19	18	
6	13	13	13	
7	9	9	9	
8	7	7	7	
9	5	5	5	

Footcandle values are initial, rounded off and based on minimum of six units.


Job Information	Type:
------------------------	--------------

Lytecaster Performance Recessed Downlighting **1101HSW**

Reflector Trim: 1101HCLSW
 Report No.: 4055FR
 Lamp: 100W ED17 Coated Metal Halide
 Initial lumens: 7900 lms
 Efficiency: 61.0%


Lighting Data

Footcandles On Wall: Multiple Units

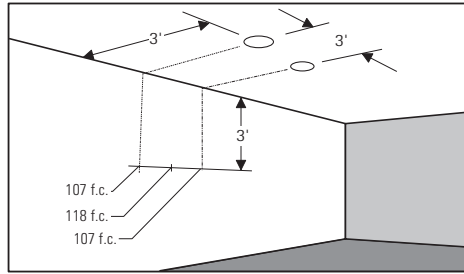


EXAMPLE: 42w with multiple clear reflector units located 3' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 47 f.c. beneath units and 47 f.c. between units.

Luminaires 3' from Wall




1'	46	31	46
2'	85	81	85
3'	107	118	107
4'	96	104	96
5'	79	78	79
6'	57	61	57
7'	43	47	43
8'	34	36	34
9'	27	28	27
10'	21	22	21
11'	17	18	17
12'	14	14	14
13'	11	12	11
14'	9	10	9

Luminaires 4' from Wall



1'	16	12	16
2'	39	31	39
3'	50	55	50
4'	60	65	60
5'	56	62	56
6'	50	50	50
7'	41	41	41
8'	32	34	32
9'	26	29	26
10'	21	23	21
11'	18	19	18
12'	15	16	15
13'	13	13	13
14'	11	11	11

Luminaires 4' from Wall



1'	15	8	15
2'	36	21	36
3'	43	40	43
4'	44	54	44
5'	42	52	42
6'	37	43	37
7'	33	34	33
8'	28	29	28
9'	22	24	22
10'	18	21	18
11'	15	18	15
12'	13	15	13
13'	11	12	11
14'	10	10	10

Average footcandle values shown are initial and are based on a minimum of four units.

Job Information **Type:**