

1113T/1102T Series

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Reflector Trim	Frame-In Kit — See Individual Frame-In Kit Specification Sheets			
	Fluorescent			
	Frame-In Kit	Installation Type	Lamping	Height
1113TCL Clear Specular	1102T1	Non-IC	2 Lamp 13W Twin Tube	3 7/8"
	1102TH1	Non-IC	Compact Fluorescent	3 7/8"
1113TGD Gold Specular	1102TH2	Non-IC	(Gx23) 2 Pin Base	3 7/8"
	1102TM1	Non-IC Emergency		3 7/8"
	1102TM2	Non-IC Emergency		3 7/8"
	1102TH1R	Non-IC		3 7/8"
	1102T13U	Non-IC	2 Lamp 13W Quad Tube Compact Fluorescent (G24q-1) 4 Pin Base	3 7/8"
	1102T18U	Non-IC	2 Lamp 18W Quad Tube Compact Fluorescent (G24q-2) 4 Pin Base	3 7/8"
	1102T26U	Non-IC	2 Lamp 26W Quad Tube Compact Fluorescent (G24q-3) 4 Pin Base	3 7/8"

Features

- 1. Reflector:** Hydroformed aluminum, 18 ga.; white gloss finish on inside and trim flange.
- 2. Cone:** Hydroformed aluminum, specular finish.
- 3. Frame-In Kit:** (1102T1 standard frame shown; other frames listed above.)
See Frame-In Kit specification sheet for more details.

Labels


UL (Suitable for Damp Locations and wall), I.B.E.W.

Options & Accessories

- Lytegems:** See 1300 Series or 1400 Series Specification Sheets.
- Accessory Cones:** **1550** - Matte Black Step Baffle
1550 - CL, GD, BK, BA, BG, WH, CD
- Retaining Clips:** **1955** - For installing in existing ceiling
- Extra Wide Flange Trim Ring:** **1954** - 8-7/8" O.D.
- Plaster Ring:** **1961**

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

SPACING RATIO = 1.5

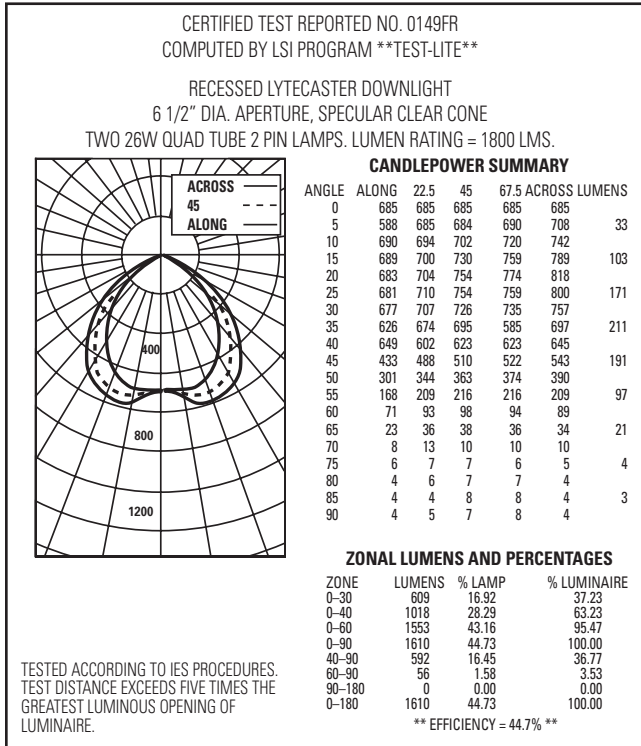

COEFFICIENTS OF UTILIZATION

% EFFECTIVE CEILING CAVITY REFLECTANCE

	% WALL REFLECTANCE																
	80			70			50			30			10			0	
	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
ROOM CAVITY RATIO	1	.49	.47	.46	.48	.47	.45	.46	.45	.44	.44	.43	.43	.43	.42	.41	.41
	2	.45	.43	.41	.44	.42	.40	.42	.41	.39	.41	.40	.39	.40	.39	.38	.37
	3	.42	.38	.36	.40	.38	.36	.39	.37	.35	.38	.36	.35	.37	.35	.34	.33
	4	.37	.34	.32	.37	.34	.32	.36	.33	.32	.35	.33	.31	.34	.32	.31	.30
	5	.34	.31	.29	.34	.31	.29	.33	.30	.28	.32	.30	.28	.31	.29	.28	.27
	6	.31	.28	.26	.31	.28	.25	.30	.27	.25	.29	.27	.25	.29	.27	.25	.24
	7	.28	.26	.23	.28	.25	.22	.27	.24	.22	.27	.24	.22	.26	.24	.22	.21
	8	.26	.22	.20	.25	.22	.20	.25	.22	.20	.24	.22	.20	.24	.21	.20	.19
	9	.23	.20	.18	.23	.20	.18	.23	.20	.18	.22	.19	.18	.22	.19	.17	.17
	10	.21	.18	.16	.21	.18	.16	.20	.18	.16	.20	.17	.16	.20	.17	.15	.15

20% FLOOR CAVITY REFLECTANCE

Conversion factors: 18W Quad Tube, C.U. x 1.0
13W Twin Tube, C.U. x 1.2

Job Information	Type:
------------------------	--------------