

1126T/1102T Series

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Reflector Trim	Frame-In Kit — See Individual Frame-In Kit Specification Sheets			
	Incandescent			
	Frame-In Kit	Installation Type	Lamping	Height
1126T Fresnel Lens	1102T1	Non-IC	2 Lamp 13W Twin Tube	3 7/8"
	1102TH1	Non-IC	Compact Fluorescent	3 7/8"
	1102TH2	Non-IC	(Gx23) 2 Pin Base	3 7/8"
	1102TM1	Non-IC Emergency		3 7/8"
	1102TM2	Non-IC Emergency		3 7/8"
	1102TH1R	Non-IC Remodeler		3 7/8"
	1102T13U	Non-IC	2 Lamp 13W Quad Tube Compact Fluorescent (G24q-1) 4 Pin Base	3 7/8"
	1102T18U	Non-IC	2 Lamp 18W Quad Tube Compact Fluorescent (G24q-2) 4 Pin Base	3 7/8"
	1102T26U	Non-IC	2 Lamp 26W Quad Tube Compact Fluorescent (G24q-3) 4 Pin Base	3 7/8"

Features

- 1. Reflector:** Hydroformed aluminum, 18 ga.; white gloss finish on inside and trim flange.
- 2. Fresnel Lens:** Clear acrylic lens. Provides high efficiency with brightness control, regressed to minimize brightness at normal viewing angles.
- 3. Splay:** Injection molded opaque white Valox®.
- 4. Frame-In Kit:** (1102T1 standard frame shown; other frames listed above.) See Frame-In Kit specification sheet for more details.

Options & Accessories

- Retaining Clips:** 1955 - For installing in existing ceiling
- Extra Wide Flange Trim Ring:** 1954 - 8-7/8" O.D.
- Plaster Ring:** 1961


Labels

UL (Suitable for Wet Locations, in Covered Ceiling; Damp Location in Walls, Spas and Hot Tubs), I.B.E.W.

Valox® is a registered trademark of General Electric.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

SPACING RATIO = 1.2

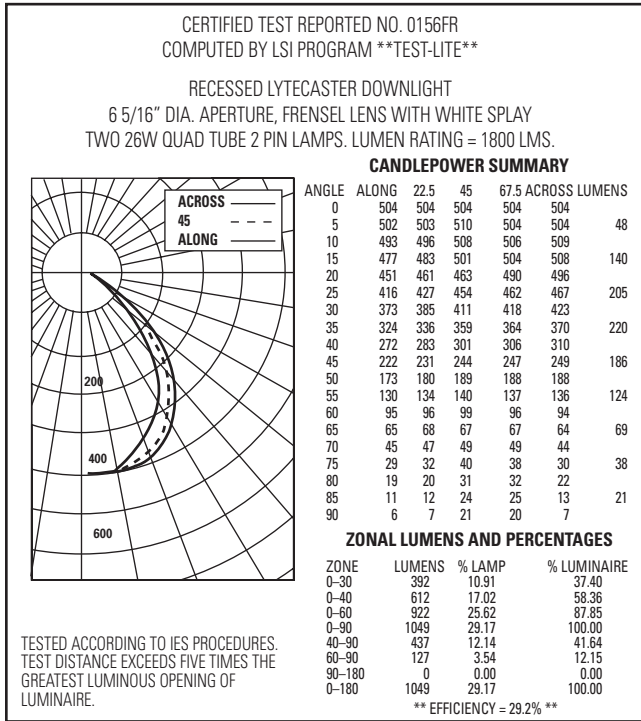

COEFFICIENTS OF UTILIZATION

% EFFECTIVE CEILING CAVITY REFLECTANCE

ROOM CAVITY RATIO	% WALL REFLECTANCE															
	80			70			50			30			10			0
	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
1	.31	.30	.26	.31	.30	.29	.29	.29	.28	.28	.28	.27	.27	.26	.26	
2	.28	.27	.25	.28	.26	.25	.27	.26	.25	.26	.25	.24	.25	.24	.23	
3	.26	.24	.22	.25	.23	.22	.24	.23	.22	.24	.22	.21	.23	.22	.20	
4	.23	.21	.20	.23	.21	.20	.22	.21	.19	.22	.20	.19	.21	.20	.18	
5	.21	.19	.17	.21	.19	.17	.20	.19	.17	.20	.18	.17	.19	.18	.16	
6	.19	.17	.16	.19	.17	.16	.19	.17	.15	.18	.17	.15	.18	.16	.15	
7	.18	.15	.14	.17	.15	.14	.17	.15	.14	.17	.15	.14	.16	.15	.13	
8	.16	.14	.12	.16	.14	.12	.16	.14	.12	.15	.14	.12	.15	.13	.12	
9	.15	.13	.11	.15	.13	.11	.14	.12	.11	.14	.12	.11	.14	.12	.10	
10	.14	.11	.10	.13	.11	.10	.13	.11	.10	.13	.11	.10	.13	.11	.09	

20% FLOOR CAVITY REFLECTANCE

Conversion factors: 18W Quad Tube, C.U. x 1.0
13W Twin Tube, C.U. x 1.2

Job Information **Type:**