
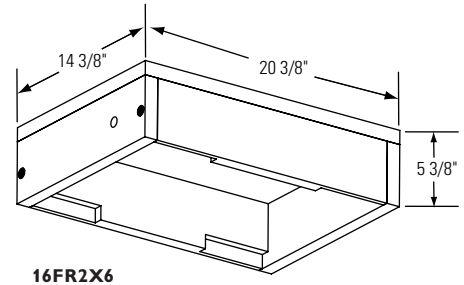


# 16FR2X6

## Lytecaster recessed downlighting 16" O. C. Fire rated enclosure

Page 1 of 1

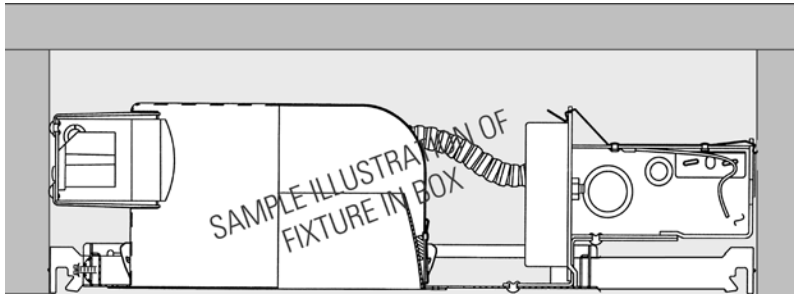

Complete fixture consists of fire rated enclosure, reflector trim & frame-in kit. Select each separately.

FireLine catalog no.	Use with frame-in kit		Use with	Lamp reflector trim
16FR2X6	<b>Fluorescent</b> 1102T1 1102TH1 1102TH2 1102T13U 1102T18U	<b>1050RN Series</b> <b>1050SQ Series</b>	All applicable trims	All applicable lamps
	<b>LED</b> 1050LRN Series 1050LSQ Series			

### Features

- DriClad™ fire rated enclosure:** 1" thickness, rated for minimum 2" x 6" construction.
- Parts bag:** (containing)
  - 4 - 2" Drywall Screws
  - 4 - 1-1/4" Drywall Screws
  - 4 - Eyelets
  - 1 - Square, Mineral Wool
  - 1 - Metal Cap
- Reflector trim:** (See reflector trim specification sheet.)
- Lamp:** (See reflector trim specification sheet and above.)
- Frame-in kit:** (See frame-in kit specification sheet.)

### Labels

UL Classified for use in one-hour fire rated L500 Series floor/ceiling assemblies (Excludes Truss ceilings)



Luminaire assemblies classified for fire resistance

DriClad™ is a registered trademark of Stan Chem, Inc.

Job Information	Type:
Job Name:	
Cat. No.:	
Notes:	

**PHILIPS**  
**LIGHTOLIER**