

Ordering Information

Catalog No.	Finish	Mounting	Lamps
22SS3ALCE	Metallic Aluminum	Advent CE Track System	Short neck PAR30 75W Max.

Features

- Track Attachment Fitting:** Locking lever for mechanical/electrical connection
- Brass Contact:** Extends for connection to second circuit (Advent Lytespan track only)
- Horizontal Pivot:** Wireless stem profile with 365° horizontal rotation
- Vertical Pivot:** 0-90° vertical adjustment
- Socket:** Porcelain socket, medium base, nickel-plated screw shell
- Housing:** Die cast aluminum
- Accessory Cartridge:** Hinged and captive; retaining ring included.
- Contact Guard:** Molded polycarbonate; prevents access to energized contacts.

Finish

All Painted finishes are baked enamel.

Dimming

Fixture may be used on a track with a dimmer.
Consult dimmer manufacturer for correct dimmer selection.

Accessories

- Accessory Holder:** Integral
- Accessories:** Accepts two total (1 lens + 1 louver or 2 lenses)
- Lens:** AF3, ADF3. Not compatible with AF3IR
- Louver:** AL3HC

Labels

CE

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	




Lytespan® Track Lighting System **22SS3CE**

AIMING ANGLE:

- L** Beam length
- W** Beam Width
- C** Distance to center beam
- D** Distance
- A** Aiming Angle
- FC** Footcandles

L and **W** are the outer points where the candle power drops to 50% of the maximum. **FC** are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance. CBCP= Center Beam Candle Power.

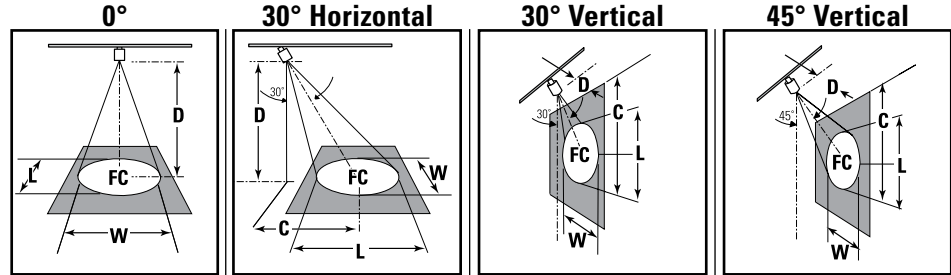

LAMP

	Beam Spread (To 50% CBCP)	CBCP	Rated Life (Hrs.)	D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W
50W PAR20 SP	10°	4,600	2,500	6'	128	1.0'	1.0'	8'	4.6'	47	1.9'	1.6'	2'	3.5'	144	1.4'	0.7'	4'	4.0'	102	1.4'	1.0'
50W PAR20 NFL	25°	1,500	2,500	4'	116	1.9'	1.9'	3'	1.7'	134	2.0'	1.7'	1'	1.7'	231	2.3'	1.0'	3'	3.0'	73	3.1'	2.0'
50W PAR30 FL	35°	1,400	3,000	6'	39	3.8'	3.8'	5'	2.9'	48	3.3'	2.8'	2'	3.5'	44	7.2'	2.5'	3'	3.0'	55	4.2'	2.7'
60W PAR16 NSP	10°	5,000	2,000	8'	78	1.4'	1.4'	7'	4.0'	25	4.6'	3.9'	3'	5.2'	19	10.8'	3.8'	4'	4.0'	31	5.6'	3.6'
60W PAR16 NFL	30°	1,300	2,000	10'	50	1.7'	1.7'	8'	4.6'	14	7.0'	5.8'	2'	3.5'	44	7.2'	2.5'	3'	3.0'	55	4.2'	2.7'
75W PAR30 NSP	10°	13,000	3,000	12'	35	2.1'	2.1'	9'	5.2'	11	7.8'	6.6'	4'	6.9'	11	14.4'	5.0'	5'	5.0'	20	7.0'	4.5'
75W PAR30 NFL	25°	3,800	3,000	6'	139	1.0'	1.0'	7'	4.0'	19	6.1'	5.1'	2'	3.5'	156	1.4'	0.7'	3'	3.0'	196	1.1'	0.7'
90W PAR38 NSP	9°	19,500	2,500	8'	78	1.4'	1.4'	5'	2.9'	130	1.2'	1.0'	3'	5.2'	69	2.1'	1.0'	5'	5.0'	71	1.6'	1.2'
90W PAR38 SP	12°	14,500	2,500	10'	50	1.7'	1.7'	7'	4.0'	17	5.1'	4.3'	2'	3.5'	41	5.5'	2.1'	4'	4.0'	29	4.6'	3.0'
90W PAR38 NFL	28°	4,500	2,500	12'	35	2.1'	2.1'	9'	5.2'	10	6.6'	5.6'	3'	5.2'	18	8.2'	3.2'	5'	5.0'	18	5.8'	3.8'
90W PAR38 WFL	55°	2,250	2,500	8'	219	1.3'	1.3'	7'	4.0'	186	1.5'	1.3'	3'	5.2'	194	1.9'	0.9'	5'	5.0'	196	1.6'	1.1'
120W PAR38 NSP	10°	25,000	3,000	12'	97	1.9'	1.9'	10'	5.8'	91	2.1'	1.8'	4'	6.9'	109	2.6'	1.3'	7'	7.0'	101	2.2'	1.6'
120W PAR38 FL	30°	4,600	3,000	16'	55	2.5'	2.5'	13'	7.5'	54	2.7'	2.4'	5'	8.7'	70	3.2'	1.6'	9'	9.0'	61	2.9'	2.0'
120W PAR38 WFL	55°	2,250	2,500	20'	35	3.1'	3.1'	16'	9.2'	36	3.4'	2.9'	6'	10.4'	49	3.6'	1.9'	11'	11.0'	41	3.5'	2.4'
250W PAR38 SP	10°	46,500	4,500	6'	106	2.7'	2.7'	7'	4.0'	69	3.6'	3.1'	3'	5.2'	119	4.2'	1.8'	4'	4.0'	84	3.7'	2.5'
250W PAR38 WFL	55°	2,000	3,000	8'	59	3.5'	3.5'	8'	4.6'	39	4.8'	4.1'	3'	5.2'	53	6.2'	2.7'	5'	5.0'	54	4.7'	3.1'
				10'	38	4.4'	4.4'	10'	5.8'	25	6.0'	5.1'	4'	6.9'	30	8.3'	3.5'	6'	6.0'	37	5.6'	3.8'
				12'	26	5.3'	5.3'	12'	6.9'	17	7.2'	6.1'	5'	8.7'	19	10.4'	4.4'	7'	7.0'	27	6.5'	4.4'
				15'	87	2.4'	2.4'	8'	4.6'	198	1.7'	1.5'	4'	6.9'	152	2.6'	1.3'	6'	6.0'	192	1.9'	1.3'
				20'	49	2.4'	2.4'	12'	6.9'	88	2.5'	2.2'	6'	10.4'	60	3.8'	1.9'	9'	9.0'	85	2.9'	2.0'
				25'	31	3.9'	3.9'	16'	9.2'	49	3.4'	2.9'	8'	13.9'	38	5.1'	2.5'	12'	12.0'	48	3.8'	2.7'
				8'	227	1.7'	1.7'	20'	11.5'	32	4.2'	3.6'	10'	17.3'	24	6.4'	3.1'	15'	15.0'	31	4.8'	3.3'
				12'	101	2.5'	2.5'	7'	4.0'	192	2.0'	1.7'	3'	5.2'	201	2.6'	1.3'	5'	5.0'	205	2.1'	1.5'
				16'	57	3.4'	3.4'	8'	5.8'	94	2.8'	2.4'	4'	6.9'	113	3.5'	1.7'	7'	7.0'	105	3.0'	2.1'
				20'	36	4.2'	4.2'	13'	7.5'	56	3.7'	3.2'	5'	8.7'	73	4.3'	2.1'	9'	9.0'	63	3.8'	2.7'
				6'	125	3.0'	3.0'	16'	9.2'	37	4.5'	3.9'	6'	10.4'	50	5.2'	2.5'	11'	11.0'	42	4.7'	3.3'
				8'	70	4.0'	4.0'	5'	2.9'	117	3.4'	2.9'	2'	3.5'	141	4.9'	2.0'	3'	3.0'	177	3.2'	2.1'
				10'	45	5.0'	5.0'	7'	4.0'	60	4.8'	4.0'	3'	5.2'	63	7.4'	3.0'	5'	5.0'	64	5.3'	3.5'
				12'	31	6.0'	6.0'	9'	5.2'	36	6.1'	5.2'	4'	6.9'	35	9.8'	4.0'	7'	7.0'	32	7.4'	4.9'
				6'	63	6.2'	6.2'	11'	6.4'	24	7.5'	6.3'	5'	8.7'	23	12.3'	5.0'	9'	9.0'	20	9.6'	6.3'
				7'	46	7.3'	7.3'	6'	3.5'	41	9.2'	7.2'	2'	3.5'	70	44.5'	4.2'	2'	2.0'	199	5.7'	2.9'
				8'	35	8.3'	8.3'	7'	4.0'	30	10.7'	8.4'	3'	5.2'	31	66.8'	6.2'	3'	3.0'	88	8.6'	4.4'
				9'	28	9.4'	9.4'	8'	4.6'	23	12.2'	9.6'	4'	6.9'	18	89.1'	8.3'	4'	4.0'	50	11.4'	5.9'
				10'	250	1.7'	1.7'	9'	5.2'	18	13.7'	10.8'	5'	8.7'	11	111.3'	10.4'	5'	5.0'	32	14.3'	7.4'
				15'	111	2.6'	2.6'	8'	4.6'	254	1.9'	1.6'	4'	6.9'	195	2.9'	1.4'	2'	2.0'	246	2.1'	1.5'
				20'	63	3.5'	3.5'	12'	6.9'	113	2.8'	2.4'	4'	10.4'	87	4.3'	2.1'	3'	3.0'	109	3.2'	2.2'
				25'	40	4.4'	4.4'	16'	9.2'	63	3.7'	3.2'	6'	13.9'	49	5.7'	2.8'	8'	8.0'	61	4.2'	3.0'
				6'	139	3.2'	3.2'	20'	11.5'	41	4.7'	4.0'	8'	17.3'	31	7.2'	3.5'	10'	10.0'	39	5.3'	3.7'
				8'	78	4.3'	4.3'	5'	2.9'	130	3.7'	3.1'	4'	6.9'	156	5.5'	2.1'	3'	3.0'	196	3.5'	2.3'
				10'	50	5.4'	5.4'	7'	4.0'	66	5.1'	4.3'	3'	5.2'	69	6.2'	3.2'	4'	4.0'	71	5.8'	3.8'
				12'	35	6.4'	6.4'	9'	5.2'	40	6.6'	5.6'	4'	6.9'	39	10.9'	4.3'	5'	5.0'	36	8.1'	5.3'
				4'	125	3.7'	3.7'	11'	6.4'	27	8.1'	6.8'	5'	8.7'	25	13.7'	5.4'	6'	6.0'	22	10.4'	6.8'
				8'	56	5.6'	5.6'	5'	2.9'	144	4.0'	3.2'	2'	3.5'	141	4.9'	2.0'	3'	3.0'	177	3.2'	2.1'
				8'	31	7.5'	7.5'	7'	4.0'	27	9.4'	7.5'	3'	5.2'	28	32.2'	5.6'	4'	4.0'	44	9.5'	5.3'
				10'	20	9.3'	9.3'	9'	5.2'	16	12.1'	9.7'	4'	6.9'	16	42.9'	7.5'	5'	5.0'	28	11.9'	6.6'
				12'	323	2.1'	2.1'	12'	6.9'	210	2.8'	2.4'	6'	10.4'	161	4.3'	2.1'	6'	6.0'	20	14.3'	7.9'
				16'	182	2.8'	2.8'	16'	9.2'	118	3.7'	3.2'	8'	13.9'	91	5.7'	2.8'	8'	8.0'	257	2.8'	2.0'
				20'	116	3.5'	3.5'	20'	11.5'	76	4.7'	4.0'	10'	17.3'	58	7.2'	3.5'	10'	10.0'	164	3.5'	2.5'
				24'	81	4.2'	4.2'	24'	13.9'	52	5.6'	4.8'	12'	20.8'	40	8.6'	4.2'	12'	12.0'	114	4.2'	3.0'
				8'	141	4.3'	4.3'	8'	4.6'	91	5.9'	5.0'	4'	6.9'	125	8.2'	3.2'	4'	4.0'	199	4.6'	3.0'
				10'	90	5.4'	5.4'	10'	5.8'	58	7.3'	6.2'	4'	6.9'	70	10.9'	4.3'	5'	5.0'	127	5.8'	3.8'
				12'	63	6.4'	6.4'	12'	6.9'	41	8.8'	7.4'	5'	8.7'	45	13.7'	5.4'	6'	6.0'	88	6.9'	4.5'
				14'	46	7.5'	7.5'	14'	8.1'	30	10.2'	8.7'	6'	10.4'	31	16.4'	6.4'	7'	7.0'	65	8.1'	5.3'

Job Information **Type:**

Lightolier a Genlyte company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2007 Genlyte Group LLC • A1007

LIGHTOLIER®