

**Ordering Information**

Catalog No.	Finish	Lamps	For Use With Luminaires
23MHRNF	Anodized	T4 GU6.5, BT PGJ5	23S20T4, 23C20T4
23MHRNFCCZ	Champagne Bronze		23S20BT, 23C20BT
23MHRNFWRM	Incandescent Warm		

**Features**

1. **Narrow Flood Reflector:** Aluminum, faceted, specular, anodized and sealed.

**Finish**

Specular Anodized and Sealed.

**Labels**

UL, cUL

Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	

# Lytespan® Track Lighting System **23MHRNF**


## Aiming Angle:

**L** Beam length  
**W** Beam Width  
**C** Distance to center beam  
**D** Distance  
**A** Aiming Angle  
**FC** Footcandles

**L** and **W** are the outer points where the candle power drops to 50% of the maximum. **FC** are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance.

CBCP = Center Beam Candle Power.

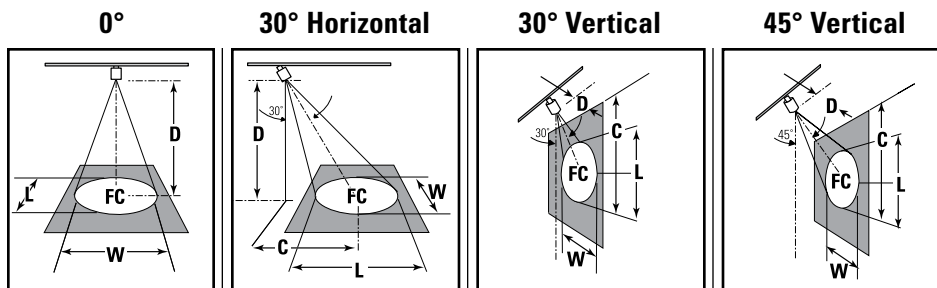

Lamp	Beam Spread (To 50% CBCP)	CBCP	Rated Life (Hrs.)	0°					30° Horizontal					30° Vertical					45° Vertical				
				D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	
20W T4, 23MHRNF, 23C20T4, 23S20T4		2386	9000	6'	66	2.7'	2.7'	6'	3.5'	43	3.6'	3.1'	2'	3.5'	75	4.2'	1.8'	2'	2.0'	211	1.9'	1.3'	
				8'	37	3.5'	3.5'	8'	4.6'	24	4.8'	4.1'	3'	5.2'	33	6.2'	2.7'	3'	3.0'	94	2.8'	1.9'	
				10'	24	4.4'	4.4'	10'	5.8'	15	6.0'	5.1'	4'	6.9'	19	8.3'	3.5'	4'	4.0'	53	3.7'	2.5'	
				12'	17	5.3'	5.3'	12'	6.9'	11	7.2'	6.1'	5'	8.7'	12	10.4'	4.4'	5'	5.0'	34	4.7'	3.1'	
22W BT-5, 23MHRNF, 23C20BT, 23S20BT		2538	12000	6'	71	2.7'	2.7'	6'	3.5'	46	3.6'	3.1'	2'	3.5'	79	4.2'	1.8'	2'	2.0'	224	1.9'	1.3'	
				8'	40	3.5'	3.5'	8'	4.6'	26	4.8'	4.1'	3'	5.2'	35	6.2'	2.7'	3'	3.0'	100	2.8'	1.9'	
				10'	25	4.4'	4.4'	10'	5.8'	16	6.0'	5.1'	4'	6.9'	20	8.3'	3.5'	4'	4.0'	56	3.7'	2.5'	
				12'	17	5.3'	5.3'	12'	6.9'	11	7.2'	6.1'	5'	8.7'	13	10.4'	4.4'	5'	5.0'	36	4.7'	3.1'	

**Note:** For Champagne Bronze (CCZ), multiply FC values by 0.64.  
 For Incandescent Warm (WRM), multiply FC values by 0.85.

<b>Job Information</b>	<b>Type:</b>
------------------------	--------------