

Ordering Information

Catalog No.	Finish	Lamps	For Use With Luminaires
24MHT45RF	Anodized	T4.5	8114, 8115
24MHT45RFCCZ	Champagne Bronze		
24MHT45RFWRM	Incandescent Warm		

Features

1. **Flood Reflector:** Aluminum, faceted, specular, anodized and sealed.

Finish

Specular Anodized and Sealed.

Labels

UL, cUL

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	


Aiming Angle:

L Beam length
W Beam Width
C Distance to center beam
D Distance
A Aiming Angle
FC Footcandles

L and **W** are the outer points where the candle power drops to 50% of the maximum. **FC** are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance.

CBCP = Center Beam Candle Power.

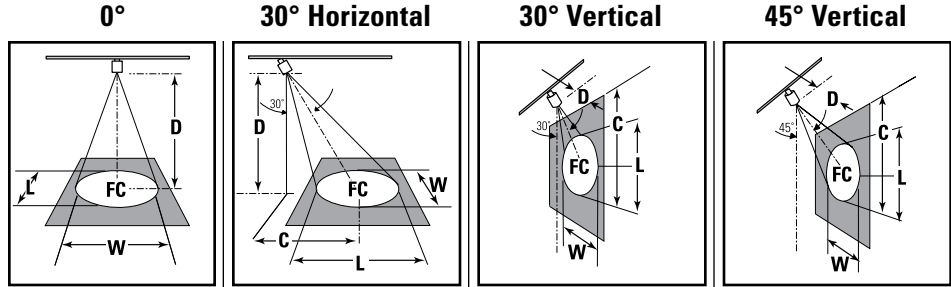

Lamp	Beam Spread (To 50% CBCP)	CBCP	Rated Life (Hrs.)	0°				30° Horizontal				30° Vertical				45° Vertical						
				D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W
 24MHT45RF 39W T4, FL 8114	 38°	3639	10000	6	101	4.1	4.1	6	3.5	66	5.7	4.8	2	3.5	114	8.6	2.8	3	3.0	143	4.7	2.9
				7	74	4.8	4.8	7	4.0	48	6.7	5.6	3	5.2	51	12.8	4.1	4	4.0	80	6.3	3.9
				8	57	5.5	5.5	8	4.6	37	7.6	6.4	4	6.9	28	17.1	5.5	5	5.0	51	7.8	4.9
				9	45	6.2	6.2	9	5.2	29	8.6	7.2	5	8.7	18	21.4	6.9	6	6.0	36	9.4	5.8
 24MHT45RF 70W T4, FL 8115	 38°	6914	10000	7	141	4.8	4.8	6	3.5	125	5.7	4.8	2	3.5	216	8.6	2.8	4	4.0	153	6.3	3.9
				8	108	5.5	5.5	7	4.0	92	6.7	5.6	3	5.2	96	12.8	4.1	5	5.0	98	7.8	4.9
				9	85	6.2	6.2	8	4.6	70	7.6	6.4	4	6.9	54	17.1	5.5	6	6.0	68	9.4	5.8
				10	69	6.9	6.9	9	5.2	55	8.6	7.2	5	8.7	35	21.4	6.9	7	7.0	50	10.9	6.8

Note: For Champagne Bronze (CCZ), multiply FC values by 0.64.
 For Incandescent Warm (WRM), multiply FC values by 0.85.

Job Information **Type:**