

Ordering Information

Catalog No.	Finish	Lamps	For Use With Luminaires
24MHT45RNF	Anodized	T4.5	8114, 8115
24MHT45RNFCCZ	Champagne Bronze		
24MHT45RNFWRM	Incandescent Warm		

Features

1. **Narrow Flood Reflector:** Aluminum, faceted, specular, anodized and sealed.

Finish

Specular Anodized and Sealed.

Labels

UL, cUL

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	


Aiming Angle:

L Beam length
W Beam Width
C Distance to center beam
D Distance
A Aiming Angle
FC Footcandles

L and **W** are the outer points where the candle power drops to 50% of the maximum. **FC** are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance.

CBCP = Center Beam Candle Power.

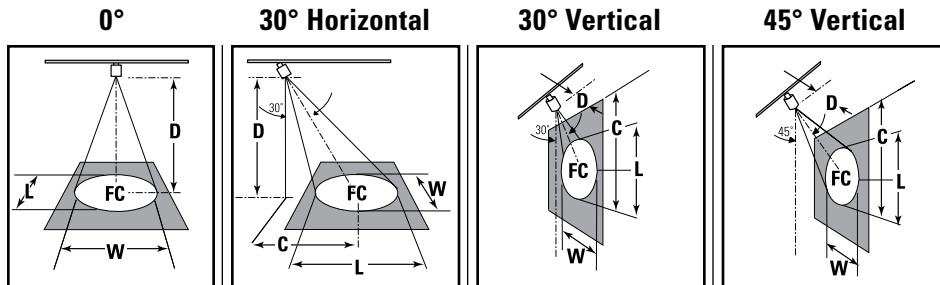

Lamp	Beam Spread (To 50% CBCP)	CBCP	Rated Life (Hrs.)	0°				30° Horizontal					30° Vertical					45° Vertical				
				D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W
 24MHT45RNF 39W T4.5 8114	 18°	10839	10000	8	169	2.5	2.5	8	4.6	110	3.4	2.9	3	5.2	151	4.1	1.9	3	3.0	426	1.9	1.3
				10	108	3.2	3.2	10	5.8	70	4.3	3.7	4	6.9	85	5.5	2.5	4	4.0	240	2.6	1.8
				12	75	3.8	3.8	12	6.9	49	5.1	4.4	5	8.7	54	6.9	3.2	5	5.0	153	3.2	2.2
				14	55	4.4	4.4	14	8.1	36	6.0	5.1	6	10.4	38	8.2	3.8	6	6.0	106	3.9	2.7
 24MHT45RNF 70W T4.5 8115	 18°	20594	10000	10	206	3.2	3.2	8	4.6	209	3.4	2.9	4	6.9	161	5.5	2.5	5	5.0	291	3.2	2.2
				12	143	3.8	3.8	10	5.8	134	4.3	3.7	5	8.7	103	6.9	3.2	6	6.0	202	3.9	2.7
				14	105	4.4	4.4	12	6.9	93	5.1	4.4	6	10.4	72	8.2	3.8	7	7.0	149	4.5	3.1
				16	80	5.1	5.1	14	8.1	68	6.0	5.1	7	12.1	53	9.6	4.4	8	8.0	114	5.2	3.6

Note: For Champagne Bronze (CCZ), multiply FC values by 0.64.
 For Incandescent Warm (WRM), multiply FC values by 0.85.

Job Information **Type:**