


Lytecaster Recessed Downlight **302MRIC7X**

Page 1 of 1 3 3/4" (95mm) Aperture Low Voltage 50W MR16 / 37W MR16 IR 12V MR16 IC Frame-In-Kit

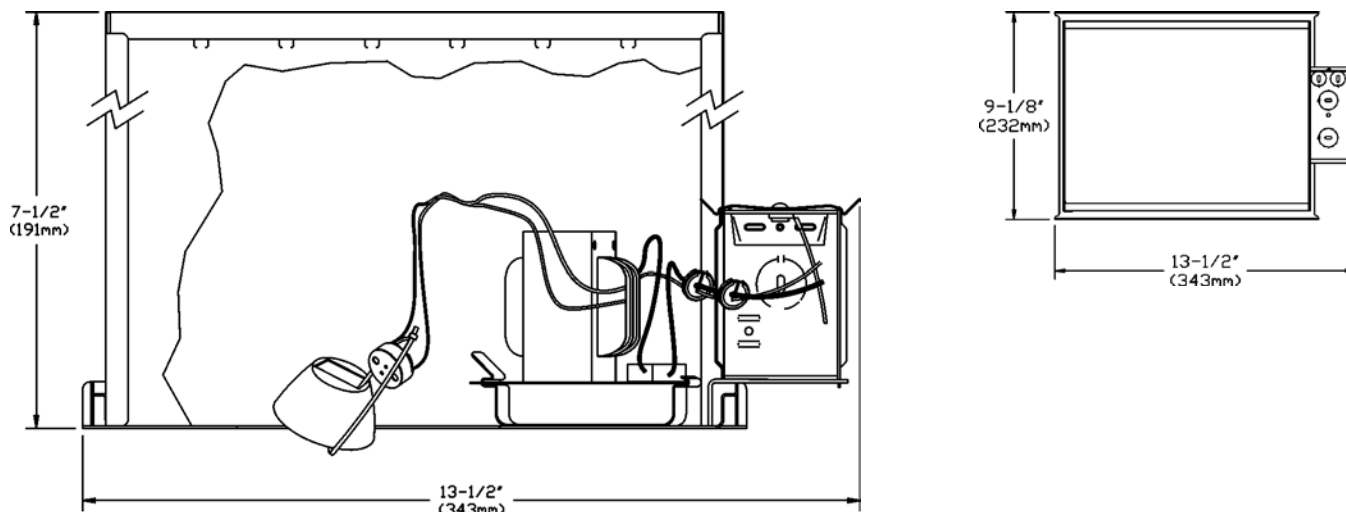

Power Pack	Cut-Out	Reflector Trim
302MRIC7X	3 3/4" (95mm)	Accepts most 3 3/4" (95mm) 300 series trims; see Reflector Trim specification sheets.

Features

- Mounting Frame:** 20ga. galvanized steel. Four slots are positioned 90° apart to simplify alignment.
- Insulated Ceiling Housing:** .018" galvanized steel. CSA certified for direct contact with thermal insulation. Internal thermal cut-out insures against overheating due to incorrect lamping.
- Mounting Bars:** (4) 18 ga. galvanized steel. 13" (330mm) long bars extend to 27" (686mm), rotatable and lockable, integral T-bar tabs. Spike detail eliminates the need of additional nailing.
- Mounting Bars Locking Clip:** (1) locks mounting bars in place. Additional clips are sold separately (0098 set of 12).
- Socket:** Porcelain body; two-pin (GX5.3 base) pre-wired with 18 ga. Teflon 250° leads to junction box.
- Transformer:** Magnetic 50VA, 120 volts primary, nominal 12 volts secondary, class "H". (integral thermal protector)
- Junction Box:** 4" (102mm) x 3" (76mm) x 2" (51mm) 18 ga. galvanized steel. CSA/UL certified for maximum of 4 No. 12 ga. 90° C through branch circuit conductors. Integral cable clamp permit attachment of non metallic Loomex without need of additional connectors. Pry-out knock-outs accept BX cable. Easy access from both sides with snap-on covers.
- Lamp Cover:** Aluminum heat deflector for 50W MR16 / 37W MR16 IR

Accessories

- Mounting Bars Extenders:** 1964
20" (508mm) long. Set of 2
- Mounting Bar Locking Clips:** 0098
To lock mounting bars in place after installation. Set of 12.
- Vapor Barrier Extender:** VBE Polyvinyl Air Vapour Barrier; to comply with provincial legislation. For all non Air-Seal frame-In-Kits.

Dimming

Dimming Controls: use only dimmers specifically designed for use with transformers, like Lightolier Onset, Sunrise series LV or VA dimmers, or any Lightolier Controls dimming system. Low voltage fixtures may produce audible noise. Attention should be given for noise sensitive applications.

Labels

cCSAus
Damp or Wet location rated depending on trim used.

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Notes: