

Complete fixture consists of: Power Head, Reflector, Deco Kit/Suspension and Deco Disk. Select each separately.

Power Head Finish: Powder Coated Textured Dark Grey or Titanium

Cat. No.	Color	Lamp	Watts	Volts	Options †
4046151	Grey	Incandescent A21	150	120	Not App.
4046151TM	Titanium	Incandescent A21	150	120	Not App.
40471U3	Grey	CFL Triple Tube	26/32/42	120/277	MX1, MX2, DA, E3
40471U3TM	Titanium	CFL Triple Tube	26/32/42	120/277	MX1, MX2, DA, E3
40471T39EU	Gray	CMH T6 G12 Base	39	120/277	N/A
40471T39EUTM	Titanium	CMH T6 G12 Base	39	120/277	N/A

† Remove U or U3 from Cat. No. and add Suffix

Note: For CFL unit with integrated emergency Battery Pack (EM) Option refer to Spec Sheet number P-EM for Cat. No. ordering guide and specification data.

Features

- Reflector:** High purity anodized aluminum, 16 gauge or Pressed colored glass with inner white frit.
- Power Head Housing:** Two-piece extruded aluminum. Removable door allows for ease of installation and servicing. Dark Grey or Titanium baked enamel powder coat finish.
- Suspension:**
Cable/Cord: 1/16" Stainless Steel/SJT 18-3, Grey or Black Cable.
Cable/Coil Cord: 1/16" Stainless Steel/SJT 18-3, Grey or Black Cable.
Suspensions have Grey or Titanium finish canopy with collar fitting to provide for precise height adjustment.
- Aperture Disk:** Glass, Acrylic, or Perforated metal.
- Support Arms:** (3) 3/8" dia. steel tubing brushed and clear lacquered.
- Adjustment:** (3) Fittings allow for height and leveling adjustment after installation.

†† Note: See specification sheet 409DK for more information on disks and arms.


Lamping (by others)

Incandescent: 150W max. A-21

Compact Fluorescent:

General Electric	Osram/Sylvania	Philips
(1) 26W Triple Tube 4-Pin (Amalgam) Compact Fluorescent Lamp F26TBX/*A/4P	CF26DT/E/IN/*	PL-T26W/*/4P
(1) 32W Triple Tube 4-Pin (Amalgam) Compact Fluorescent Lamp F32TBX/*A/4P	CF32DT/E/IN/*	PL-T32W/*/4P
(-1) 42W Triple Tube 4-Pin (Amalgam) Compact Fluorescent Lamp F42TBX/*A/4P	CF42DT/E/IN/*	PL-T42W/*/4P

*Manufacturers color temperature designation

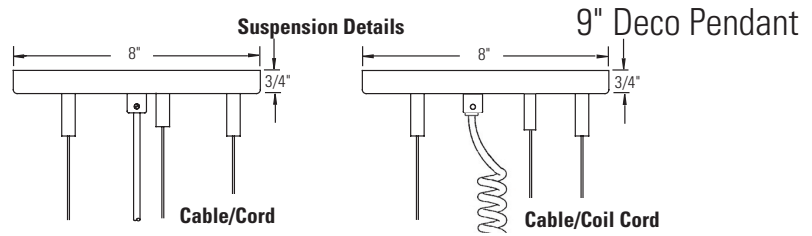

Deco Kits

††Cat. No.	Color	Description
409DK*	Grey	Deco Cable Assembly Cord/Cable Coil and Cord 120"
409DK5*	Grey	Deco Cable Assembly, 5-wire straight cord, 120" **
409DKTM*	Titanium	Deco Cable Assembly 120"
409DKTM5*	Titanium	Deco Cable Assembly, 5-wire straight cord, 120" **

* Includes Deco Arms, Cord/Cable and Coil Cord 120".
** DALI requires a 5-wire Suspension.

Deco Disks

††Cat. No.	Description
409DG	Glass Deco Disk
409DA	Acrylic Deco Disk
409PM	Perforated Metal Deco Disk

Optional Extension Kits (Used with Deco Suspension Kits)

Cat. No.	Color	Description
404EXT300	Grey	25" Straight Cable/Cord Extension Kit
404EXTB	Black	25" Straight Cable/Cord Extension Kit
404EXT300G5**	Grey	5-wire, 25' Cord/Cable
404EXT300B5**	Black	5-wire, 25' Cord/Cable

**DALI requires a 5-wire Suspension

9" Power Head Options (add Suffix to Cat. No.)

- MX1** = Mark X Dimming
26/32/42W, 120V only*
- MX2** = Mark X Dimming
26/32/42W, 277V only*
- E3** = 347V (Canada)
- DA** = DALI (Digital Addressable lighting Interface)**

Reflector/Glass Shade

Cat. No.	Description
40411	Semi Specular Anodized Reflector
40413	Satin & Anodized Reflector
409WH	White Glass Shade
409BL	Cobalt Blue Glass Shade
409AB	Amber Glass Shade

* 2-wire, neutral connection required at dimming control.

** 5-wire Suspension Kit required.

Electrical

Lampholders: Incandescent: Medium Base, Porcelain, Nickel-Plated Screw Shell.
Compact Fluorescent: 4-pin, 26/32 watt base: GX24q-3;
42 watt base: GX24q-4.

Ballasts: Fluorescent, Electronic

Voltage	26 Watt		32 Watt		42 Watt	
	120	277	120	277	120	277
Total Input Watts	-26	-26	-36	-36	-47	-47
Max. Line Current (Amps)	.22	.09	.30	.09	.39	.17

Power Factor > 0.98, Ballast Factor 0.98, THD < 10%

Minimum Starting Temperature 0°F

Labels

cULus listed suitable for damp locations.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710

We reserve the right to change details of design, materials and finish.

www.lightolier.com © 2008 Philips Group • E0708

