

Order Information

Catalog No.	Lamps	Width	Height	Extension	Ballast(s) Type	Voltage
40622U	(1) 26W Quad Tube 4-Pin	14"	6 7/8"	4"	(1) - 1 Lt. Electronic	120V/277V

Features

- Diffuser:** Pressed, etched glass with clear v-grooves. Removable by unscrewing two holder knobs.
- Ballast:** Rated Class "P". See chart above for electrical specifications.
- Backplate:** Die-formed 20 ga. steel, matte white finish.
- Holder Knobs:** Turned brass, polished and clear lacquered.

Labels

UL listed suitable for damp locations, I.B.E.W.

Lamping

Compact Fluorescent: 26W Quad Tube 4-Pin, G24q-3 base

General Electric	Osram/Sylvania	Phillips
F26 DBXT4/SPX*/4P	CF26DD/E/*	PL-C26W/*/4p

* Manufacturers' color temperature designation.

Mounting

Fixture is provided with a mounting plate suitable for direct mounting to most outlet boxes or directly to wall over an outlet box.

Electrical

Lampholders: Compact Fluorescent: 4-pin, G24q-1 base


Ballasts:	Electronic 120/277V
Total input Watts	29
Max. line Current (Amps)	.17 / .11
Power Factor	>.97
Ballast Factor	>.98
THD	<10%
Min. Starting Temp.	-18°C (0°F)

Fixture conforms to Americans with Disabilities Act (ADA) Federal Regulations—Protruding Objects.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

Lightolier a Genlyte Thomas Company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

LIGHTOLIER®

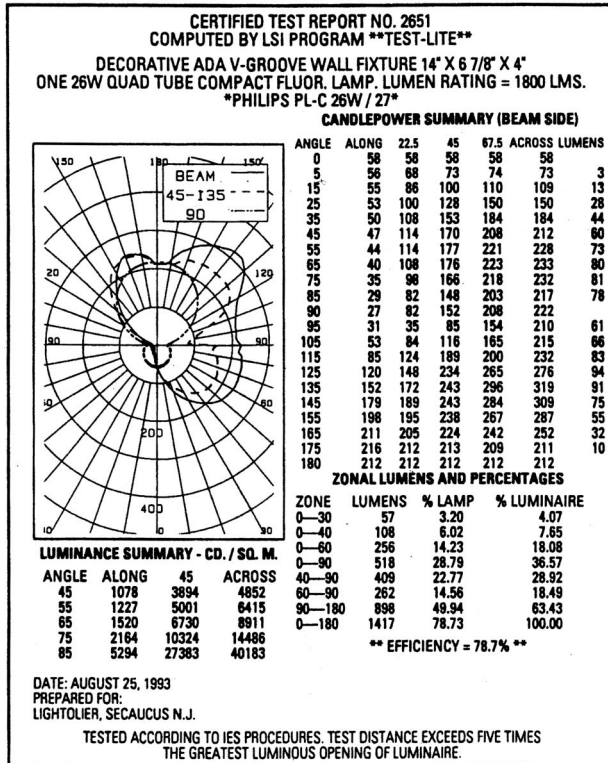

CORRIDOR LIGHTING
Footcandles on Floor

10'	1.0	1.0	1.1	1.1	1.1	1.1	1.1
9'	1.1	1.2	1.3	1.3	1.3	1.3	1.2
8'	1.3	1.5	1.5	1.6	1.5	1.5	1.4
7'	1.6	1.8	1.9	1.9	1.9	1.8	1.7
6'	1.9	2.2	2.3	2.3	2.2	2.1	1.9
5'	2.4	2.7	2.8	2.8	2.7	2.5	2.3
4'	2.9	3.2	3.4	3.3	3.1	2.9	2.6
3'	3.5	3.8	3.9	3.8	3.6	3.2	2.9
2'	4.0	4.3	4.5	4.3	4.0	3.5	3.1
1'	4.2	4.7	4.8	4.6	4.2	3.7	3.2
0'	4.2	4.7	4.8	4.6	4.2	3.7	3.3

← Luminaire

Footcandles values are initial.
 Luminaire mounted 6'6" above floor.
 Corridor is 8' wide by 8' high.
 Room Reflectances: 80% Ceiling, 50% Walls, 20% Floor.
 For multiple luminaires add together footcandles contributed by each luminaire at point(s) desired.

Job Information **Type:**

Lightolier a Genlyte Thomas Company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

LIGHTOLIER