

Reflector Trim	Frame-In Kit
<p>8046CLW Clear Iridescence Free, White Flange 8046CLP Clear Iridescence Free, Polished Flange 8046 Add suffix. See options for other finishes.</p>	<p>S6132BU 6" aperture, 1 lamp 26/32W Triple Tube CFL (120/277V) 4-Pin (Amalgam) Dimming Options: S6132B <input type="checkbox"/> CU3 Lightolier PowerSpec 3% Dimming (120/277V) J1LD3 Lutron 5% Dimming (120V) J2LD3 Lutron 5% Dimming (277V) JUM7 Mark 7 Dimming (120/277V) J1MX Mark 10 Dimming (120V) J2MX Mark 10 Dimming (277V) Other dimming product available, please consult factory</p>
Remodeler Frame-In Kits	
<p>6126BURM 6" aperture, 1 lamp 26W Triple Tube CFL (120/277V) 4-Pin (Amalgam) 6132BURM 6" aperture, 1 lamp 26/32W Triple Tube CFL (120/277V) 4-Pin (Amalgam)</p>	

Features

- Optics:** Directional prismatic glass spread lens and Alzak® "kick" reflector direct light smoothly across and down wall. Rotates for correct orientation. Aperture cone with Iridescence Free finish.
- Socket Cup:** Effectively dissipates heat and positions lamp holder. Snaps onto reflector neck to assure consistently correct optical alignment without tools.
- Mounting Frame:** Galvanized steel for dry or plaster ceilings. Accepts other 6" Triple Tube reflectors (see S6132BU Spec Sheet).
- Retaining Springs:** Precision-tooled steel friction springs secure reflector to mounting frame for quick, tool-less installation.
- Mounting Brackets:** 16 ga. steel. Adjust from inside of fixture. Use 3/4" or 1 1/2" lathing channel, 1/2" EMT, or optional mounting bars.
- Ballast/J-Box:** Electronic 120V-277V. UL listed for through branch circuit wiring with max of (8) No. 12AWG, 90°C supply conductors. Outboard mounted to reduce heat transfer and maintain lamp efficacy and life. Service from below without tools.
- Torsionite Springs:** Wire formed steel holds reflector/spread lens assembly snug to housing.

Electrical

Note: For ballast electrical data and latest lamp/ballast compatibility refer to "Ballast" specification sheet for complete electrical data.

UL listed for through branch circuit wiring with max of (8) No. 12 AWG, 90° C supply conductors.

Options and Accessories

Comfort Clear™ Finishes¹	Other Finishes	
Clear	CCL	White WH
Diffuse	CCD	
Champagne Bronze	CCZ	

¹Specify desired flange. **W** White, **P** Polished, Blank - Molded Ring

Options and Accessories (continued)

Emergency	Add suffix EM*
Chicago Plenum	Use 6132BULC
Existing/Thk. Ceiling	FA EC6*
Emergency Ltg. Kit	FA EM3E*
	FA EM4E*
Fuse (slow blow)	Add suffix F

*See Spec. Sheets: FAEC, FAEM

Mounting Bars & Accessories; see Specification Sheet MBA.
 Sloped Ceiling Adapters; see Specification Sheet SCA.
 IC Frame available; see **C6CFL32** specification sheet.

Labels


UL listed for damp locations. Alzak® is a registered trademark of ALCOA.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 www.lightolier.com © 2011 Philips Group • C0711


Lighting Data

Footcandles On Wall: Multiple 26w Units

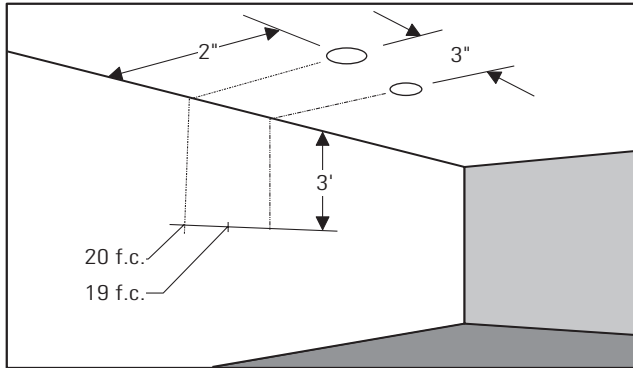

EXAMPLE: With multiple clear reflector units located 2' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 19 f.c. beneath units and 20 f.c. between units.

Footcandles On Wall: Multiple 32w Units

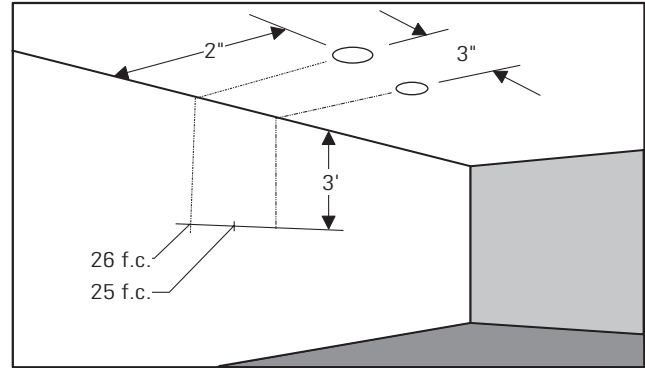

EXAMPLE: With multiple clear reflector units located 2' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 26 f.c. beneath units and 25 f.c. between units.

2' From Wall-2' On Center

← 2' →			
1	24	22	24
2	31	31	31
3	28	28	28
4	22	22	22
5	17	17	17
6	13	13	13
7	10	11	10
8	9	9	9
9	7	7	7

2' From Wall-3' On Center

← 3' →			
1	19	12	19
2	23	19	23
3	20	19	20
4	15	15	15
5	12	12	12
6	9	9	9
7	8	8	8
8	6	6	6
9	6	6	6

2' From Wall-2' On Center

← 2' →			
1	33	30	33
2	48	46	48
3	38	38	38
4	28	28	28
5	20	20	20
6	15	15	15
7	12	12	12
8	10	10	10
9	8	8	8

2' From Wall-3' On Center

← 3' →			
1	27	16	27
2	36	27	36
3	26	25	26
4	19	19	19
5	14	14	14
6	11	11	11
7	9	9	9
8	7	7	7
9	6	6	6

3' From Wall-3' On Center

← 3' →			
1	7	6	7
2	13	12	13
3	14	14	14
4	14	14	14
5	12	12	12
6	10	11	10
7	9	9	9
8	8	8	8
9	7	7	7

3' From Wall-4' On Center

← 4' →			
1	6	4	6
2	11	9	11
3	11	10	11
4	11	10	11
5	9	9	9
6	8	8	8
7	7	7	7
8	6	6	6
9	6	6	6

3' From Wall-3' On Center

← 3' →			
1	9	8	9
2	19	18	19
3	22	21	22
4	19	19	19
5	16	16	16
6	13	13	13
7	11	11	11
8	9	9	9
9	8	8	8

3' From Wall-4' On Center

← 4' →			
1	8	5	8
2	16	12	16
3	17	15	17
4	15	14	15
5	12	12	12
6	10	10	10
7	8	8	8
8	7	7	7
9	6	6	6

Footcandle values are averaged and rounded off and based on minimum of five units.

Job Information

Type:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2011 Philips Group • C0711