

Luminaria Fluorescente Compacta
 Installacion bajo plafon.
 213mm (8 3/8") Apertura
 Compact Fluorescent Luminaire
 Below Ceiling Installation
 213mm (8 3/8") Aperture



Luminaria Empotrada
 Calculite

Calculite
 Recessed
 Downlight

8242HURM-EX

EXPORTACION
 FOR EXPORT ONLY

TYPE:

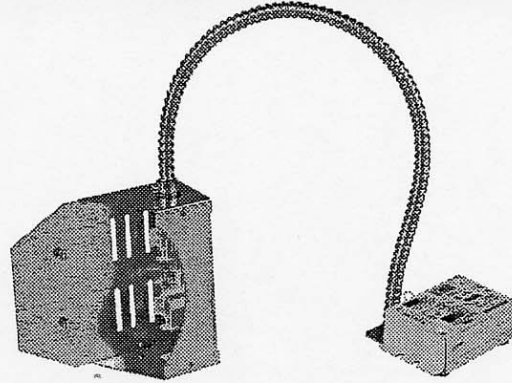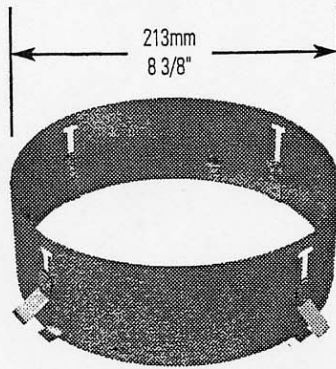

La luminaria completa consiste en la MOLDURA DE REFLECTOR Y EL BASTIDOR INCORPORADO. Selecciones cada uno en forma separada.

Complete fixture consists of REFLECTOR TRIM & FRAME - IN KIT. Select each separately.

Bastidor Incorporado Frame-In Kit	Tipo de Lampara Lamp Type
<input type="checkbox"/> 8242HURMEX	<input type="checkbox"/> 32W Triple Tube 4 Pin (GX24Q-3) <input type="checkbox"/> 42W Triple Tube 4 Pin (GX24Q-4)

Molduras del reflector - Via la hoja de especificaciones individuales de cada moldura de reflector.
Reflector trims - See individual reflector trim specification sheets.

Lampara Horizontal Horizontal Downlight	Bano Pared Horizontal Horizontal Wall Washer	Hoja Cruzada Blade/Baffle	Lampara Turbo Turbo Downlight
<input type="checkbox"/> 8038CLW <input type="checkbox"/> 8038CLP <input type="checkbox"/> 8038CLT <input type="checkbox"/> 8039CLW <input type="checkbox"/> 8039CLP <input type="checkbox"/> 8039CLT	N/A	<input type="checkbox"/> 8069CLW <input type="checkbox"/> 8069CLP <input type="checkbox"/> 8069CLT	<input type="checkbox"/> 8038TBW <input type="checkbox"/> 8038TBP <input type="checkbox"/> 8038TBT

**Caracteristicas
Features**

1.0 Anillo de montaje: Acero galvanizado de 0.032" (calibre 22). Se adapta a los techos existentes con un grosor de hast 51mm. Se acopla fijamente a cuaquire material de techo sin necesidad de uklitizar herrameintas usando (4) clavijas de montje profistos. Los clips giratorios sujetan el reflector al ras con el techo. Se incluye una plantilla de abertura con respaldo adhesivo.
 1.0 Mounting ring: 0.032" (#22 ga.) galvanized steel. Accommodates existing ceiling up to 51mm thick. Attaches securely to any type of ceiling material without tools using (4) mounting clamps provided. Push-in/twist-out clips hold reflectors flush to ceiling. Includes adhesive backed aperture template.
 2.0 Receptaculo: De termoplastico moldeado; precableado con conductores No. 18 AWN
 2.0 Socket: Molded thermoplastic; prewired with #18 AWN leads.
 3.0 Caja del receptaculo: Acero galvnizado de resorte calibre 22; de armado rapido a presion para la ubicacion precisa de la luminara.
 3.0 Socket housing: 22 ga. galvanized spring steel; snap-in quick assembly for precise lamp location.

**Opciones y accesorios
Options & accessories**

Clips de repuesto: Consultar a fabrica.
 Replacement clips: Consult factory.

WE RESERVE THE RIGHT TO CHANGE DETAILS OF DESIGN, MATERIALS AND FINISH, IN ANY WAY.

LIGHTOLIER a GENLYTE THOMAS company.
 631 Airport Road, Fall River, MA 02720
 (508) 679-8131 • Fax (508) 674-4710

Copyright 2000

LIGHTOLIER®