

### Ordering Information

Catalog No.	Finishes	Mountings	Lamps
8676B WH	Matte White	All Power Jacks	MR16 50W MAX
8676B BK	Matte Black		37W MAX IR
8676B AL	Metallic Aluminum		

### Features

- Ring:** Die-cast aluminum with cool grip insulation band, a high temperature silicone rubber, which allows aiming adjustments while fixture is on.
- Socket:** Bi-pin base ceramic socket, prewired with 18 ga. stranded Teflon® leads, with fiberglass outer sleeve.
- Male Jack Connector:** Mounted in 3/8" dia. stainless steel stem. Plugs into any 8600 Power Jack or Extender Stem. Allows for 360° horizontal rotation.
- Tension Pivot Mount:** Die-cast aluminum. Allows for 180° vertical rotation.
- Lamp Guard:** Tempered glass.
- Housing:** Aluminum, fully encloses lamp back and socket. Vents dissipate lamp heat. Die-Cast aluminum.

### Finish

All painted finishes are powder coated baked enamel.

### Options & Accessories

Accessory Holder (7662) may be used with

- One SNOOT (22SR6AL, BK, WH) plus one lens\* or louver.
- or One Lens (AF2 Series or ADF2 Series)
- or One Louver (AL2 Series).

\*Color Filters (ADF2 Series) may **not** be used with a SNOOT.

### Electrical/Dimming

For dimming information refer to Power Jack specification sheets.

### Labels

UL, CUL

Teflon® is a registered trademark of E.I. DuPont.

Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	


Lightolier a Genlyte company www.lightolier.com  
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 © 2006 Genlyte Group LLC • D1206



### Lighting Data Aiming Angle:

- L** Beam length
- W** Beam width
- C** Distance to center of beam
- D** Distance
- A** Aiming angle
- FC** Footcandles

**L** and **W** are the outer points where the candlepower drops to 50% of the maximum. **FC** are the initial footcandles at the center of the beam.

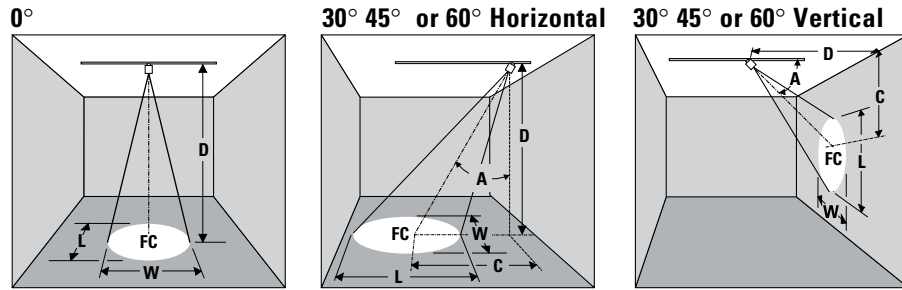

LAMP	Beam Spread 50% Max CP	Beam Center C.P. Candelas	Rated Life-Hrs	0° AIMING ANGLE					A=30° AIMING ANGLE					A=45° AIMING ANGLE					A=60° AIMING ANGLE				
				D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	
20W MR16 (T-H) VNSP (EZK) 7°	7°	8200	3000	7'	167	0.9'	0.9'	6'	3.5'	148	1.0'	0.8'	4'	4.0'	181	1.0'	0.7'	2'	3.5'	256	1.0'	0.5'	
20W MR16 (T-H) NSP (ESX) 13°	13°	3600	3000	10'	82	1.2'	1.2'	9'	5.2'	68	1.5'	1.3'	6'	6.0'	81	1.5'	1.0'	3'	5.2'	114	1.5'	0.7'	
20W MR16 (T-H) FL (BAB) 40°	40°	525	4000	13'	49	1.6'	1.6'	12'	6.9'	37	2.0'	1.7'	8'	8.0'	45	2.0'	1.4'	4'	6.9'	64	2.0'	1.0'	
20W MR16 (T-H) NSP (FRB) 12°	12°	8700	4000	16'	32	2.0'	2.0'	15'	8.7'	24	2.4'	2.1'	10'	10.0'	29	2.5'	1.7'	5'	8.7'	41	2.5'	1.2'	
35W MR16 (T-H) SP (FRA) 20°	20°	3900	4000	6'	100	1.4'	1.4'	5'	2.9'	94	1.5'	1.3'	3'	3.0'	141	1.4'	1.0'	2'	3.5'	113	1.9'	0.9'	
35W MR16 (T-H) FL (FMW) 40°	40°	1600	4000	8'	56	1.8'	1.8'	7'	4.0'	48	2.1'	1.8'	5'	5.0'	51	2.3'	1.6'	3'	5.2'	50	2.8'	1.4'	
42W MR16 (T-H) VNSP (EZY) 9°	9°	13100	3500	10'	36	2.3'	2.3'	9'	5.2'	29	2.7'	2.4'	7'	7.0'	26	3.2'	2.3'	4'	6.9'	28	3.8'	1.8'	
42W MR16 (T-H) NFL (EYS) 27°	27°	2400	4000	12'	25	2.7'	2.7'	11'	6.4'	19	3.4'	2.9'	9'	9.0'	16	4.2'	2.9'	5'	8.7'	18	4.7'	2.3'	
50W MR16 (T-H) NSP (EXT) 14°	14°	10200	4000	2'	131	1.5'	1.5'	2'	1.2'	85	2.0'	1.7'	2'	2.0'	46	3.4'	2.1'	1'	1.7'	66	4.8'	1.5'	
50W MR16 (T-H) NFL (EXZ) 27°	27°	3400	4000	3'	58	2.2'	2.2'	3'	1.7'	38	3.0'	2.5'	3'	3.0'	21	5.0'	3.1'	2'	3.5	16	8.7'	2.9'	
50W MR16 (T-H) FL (EXN) 40°	40°	1850	4000	4'	33	2.9'	2.9'	4'	2.3'	21	4.1'	3.4'	4'	4.0'	12	6.7'	4.1'	3'	5.2'	7	14.5'	4.4'	
50W MR16 (T-H) WFL (FNV) 55°	55°	1150	4000	5'	21	3.6'	3.6'	5'	2.9'	14	5.1'	4.2'	5'	5.0'	7	8.4'	5.1'	4'	6.9'	4	19.3'	5.8'	
				7'	178	1.5'	1.5'	6'	3.5'	157	1.7'	1.5'	4'	4.0'	192	1.7'	1.2'	2'	3.5'	272	1.7'	0.8'	
				10'	87	2.1'	2.1'	9'	5.2'	70	2.5'	2.2'	6'	6.0'	85	2.6'	1.8'	3'	5.2'	121	2.6'	1.3'	
				13'	51	2.7'	2.7'	12'	6.9'	39	3.4'	2.9'	8'	8.0'	48	3.4'	2.4'	4'	6.9'	68	3.5'	1.7'	
				16'	34	3.4'	3.4'	15'	8.7'	25	4.2'	3.6'	10'	10.0'	31	4.3'	3.0'	5'	8.7'	44	4.3'	2.1'	
				6'	108	2.1'	2.1'	5'	2.9'	101	2.4'	2.0'	3'	3.0'	153	2.2'	1.5'	2'	3.5'	122	3.1'	1.4'	
				8'	61	2.8'	2.8'	7'	4.0'	52	3.3'	2.9'	5'	5.0'	55	3.6'	2.5'	3'	5.2'	54	4.7'	2.1'	
				10'	39	3.5'	3.5'	9'	5.2'	31	4.3'	3.7'	7'	7.0'	28	5.1'	3.5'	4'	6.9'	30	6.2'	2.8'	
				12'	27	4.2'	4.2'	11'	6.4'	21	5.2'	4.5'	9'	9.0'	17	6.6'	4.5'	5'	8.7'	20	7.8'	3.5'	
				4'	100	2.9'	2.9'	10'	16	7.3'	7.3'	10'	16	7.3'	7.3'	9'	5.2'	13	9.1'	16	10.1'	6.2'	
				6'	44	4.4'	4.4'	3'	1.7'	115	3.0'	2.5'	3'	3.0'	63	5.0'	3.1'	1'	1.7'	200	4.8'	1.5'	
				8'	25	5.8'	5.8'	5'	2.9'	42	5.1'	4.2'	4'	4.0'	35	6.7'	4.1'	2'	3.5	50	9.7'	2.9'	
				20'	33	3.1'	3.1'	7'	4.0'	21	7.1'	5.9'	5'	5.0'	23	8.4'	5.1'	3'	5.2'	22	14.5'	4.4'	
				8'	205	1.3'	1.3'	7'	4.0'	174	1.5'	1.3'	5'	5.0'	185	1.6'	1.1'	4'	6.9'	13	19.3'	5.8'	
				12'	91	1.9'	1.9'	10'	5.8'	85	2.1'	1.8'	7'	7.0'	95	2.2'	1.6'	11'	11.0'	38	3.5'	2.4'	
				16'	51	2.5'	2.5'	13'	7.5'	50	2.7'	2.4'	9'	9.0'	57	2.9'	2.0'	16'	9.2'	33	3.4'	2.9'	
				4'	150	1.9'	1.9'	10'	24	4.8'	4.8'	10'	24	4.8'	4.8'	9'	5.2'	19	5.9'	33	3.1'	2.0'	
				6'	67	2.9'	2.9'	10'	5.8'	85	2.1'	1.8'	7'	7.0'	95	2.2'	1.6'	5'	5.0'	182	1.9'	0.9'	
				8'	38	3.8'	3.8'	13'	7.5'	50	2.7'	2.4'	9'	9.0'	57	2.9'	2.0'	4'	6.9'	102	2.6'	1.3'	
				20'	26	4.9'	4.9'	10'	24	4.8'	4.8'	10'	24	4.8'	4.8'	9'	5.2'	19	5.9'	50	9.7'	2.9'	
				3'	173	2.0'	1.7'	7'	4.0'	135	2.3'	2.0'	5'	5.0'	144	2.5'	1.7'	5'	5.2'	142	3.1'	1.5'	
				5'	2.9'	62	3.3'	2.8'	7'	4.0'	32	4.6'	3.9'	5'	5.0'	34	5.1'	3.4'	4'	6.9'	80	4.1'	2.0'
				7'	4.0'	32	4.6'	3.9'	7'	4.0'	32	4.6'	3.9'	5'	5.0'	34	5.1'	3.4'	5'	8.7'	51	5.1'	2.5'
				20'	26	4.9'	4.9'	20'	26	4.9'	4.9'	20'	26	4.9'	4.9'	15'	9.2'	28	5.3'	38	5.5'	3.8'	
				3'	173	2.0'	1.7'	7'	4.0'	135	2.3'	2.0'	5'	5.0'	144	2.5'	1.7'	3'	3.0'	134	3.1'	2.0'	
				5'	2.9'	62	3.3'	2.8'	7'	4.0'	32	4.6'	3.9'	5'	5.0'	34	5.1'	3.4'	5'	8.7'	51	5.1'	2.5'
				7'	4.0'	32	4.6'	3.9'	7'	4.0'	32	4.6'	3.9'	5'	5.0'	34	5.1'	3.4'	6'	10.4'	35	6.2'	2.9'
				20'	26	4.9'	4.9'	20'	26	4.9'	4.9'	20'	26	4.9'	4.9'	15'	9.2'	28	5.3'	38	5.5'	3.8'	
				3'	173	2.0'	1.7'	7'	4.0'	135	2.3'	2.0'	5'	5.0'	144	2.5'	1.7'	3'	3.0'	134	3.1'	2.0'	
				5'	2.9'	62	3.3'	2.8'	7'	4.0'	32	4.6'	3.9'	5'	5.0'	34	5.1'	3.4'	4'	6.9'	19	9.3'	3.8'
				7'	4.0'	32	4.6'	3.9'	7'	4.0'	32	4.6'	3.9'	5'	5.0'	34	5.1'	3.4'	4'	6.9'	19	9.3'	3.8'
				20'	26	4.9'	4.9'	20'	26	4.9'	4.9'	20'	26	4.9'	4.9'	15'	9.2'	28	5.3'	38	5.5'	3.8'	
				3'	173	2.0'	1.7'	7'	4.0'	135	2.3'	2.0'	5'	5.0'	144	2.5'	1.7'	3'	3.0'	134	3.1'	2.0'	
				5'	2.9'	62	3.3'	2.8'	7'	4.0'	32	4.6'	3.9'	5'	5.0'	34	5.1'	3.4'	4'	6.9'	19	9.3'	3.8'
				7'	4.0'	32	4.6'	3.9'	7'	4.0'	32	4.6'	3.9'	5'	5.0'	34	5.1'	3.4'	4'	6.9'	19	9.3'	3.8'
				20'	26	4.9'	4.9'	20'	26	4.9'	4.9'	20'	26	4.9'	4.9'	15'	9.2'	28	5.3'	38	5.5'	3.8'	
				3'	173	2.0'	1.7'	7'	4.0'	135	2.3'	2.0'	5'	5.0'	144	2.5'	1.7'	3'	3.0'	134	3.1'	2.0'	
				5'	2.9'	62	3.3'	2.8'	7'	4.0'	32	4.6'	3.9'	5'	5.0'	34	5.1'	3.4'	4'	6.9'	19	9.3'	3.8'
				7'	4.0'	32	4.6'	3.9'	7'	4.0'	32	4.6'	3.9'	5'	5.0'	34	5.1'	3.4'	4'	6.9'	19	9.3'	3.8'
				20'	26	4.9'	4.9'	20'	26	4.9'	4.9'	20'	26	4.9'	4.9'	15'	9.2'	28	5.3'	38	5.5'	3.8'	
				3'	173	2.0'	1.7'	7'	4.0'	135	2.3'	2.0'	5'	5.0'	144	2.5'	1.7'	3'	3.0'	134	3.1'	2.0'	
				5'	2.9'	62	3.3'	2.8'	7'	4.0'	32	4.6'	3.9'	5'	5.0'	34	5.1'	3.4'	4'	6.9'	19	9.3'	3.8'
				7'	4.0'	32	4.6'	3.9'	7'	4.0'	32	4.6'	3.9'	5'	5.0'	34	5.1'	3.4'	4'	6.9'	19	9.3'	3.8'
				20'	26	4.9'	4.9'	20'	26	4.9'	4.9'	20'	26	4.9'	4.9'	15'	9.2'	28	5.3'	38	5.5'	3.8'	
				3'	173	2.0'	1.7'	7'	4.0'	135	2.3'	2.0'	5'	5.0'	144	2.5'	1.7'	3'	3.0'	134	3.1'	2.0'	
				5'	2.9'	62	3.3'	2.8'	7'	4.0'	32	4.6'	3.9'	5'	5.0'	34	5.1'	3.4'	4'	6.9'	19	9.3'	3.8'
				7'	4.0'	32	4.6'	3.9'	7'	4.0'	32	4.6'	3.9'	5'	5.0'	34	5.1'	3.4'	4'	6.9'	19	9.3'	3.8'
				20'	26	4.9'	4.9'	2															