

Ceiling Cutout: 5 3/4" (146 mm) Dia.

Ordering Information

Reflector Trim	Installation Ring	Lamp Data
C4P30CCDPEXP Comfort Clear Diffuse, Polished Flange	C4XRMM Matte White	75W PAR30 Halogen E27 240V

Features

- Trim:** 16 ga. Alzak® aluminum, 50° visual cutoff to lamp and lamp image. Removable from below for bottom relamping.
- Reflector Housing:** Snaps into frame for easy toolless installation. Provides friction spring clips to secure aperture cone. Interchangeable with other Evolution 4" line voltage trims.
- Socket Harness:** Bracket mounted to reflector housing insuring correct optical alignment. Medium base E27 porcelain socket with nickel plated screw shell. No. 18 (1.0 mm²) SF-1 leads to terminal block for 3 No. 18 (1.0 mm²) supply leads (line, neutral and ground).
- Installation Ring:** Cast aluminum ring is painted matte white and has two 17 ga. stainless steel springs that engage in upright position during installation. One touch snap action secures ring in ceiling cutout. ORDER SEPARATELY. See separate Installation Ring specification sheet for more details.
- Trim Retention Springs:** Rust resistant springs secure reflector/housing for quick, toolless installation (quantity of 4).

Certifications and Ratings



Job Information


Type:

Job Name:

Cat. No.:

Lamp(s):

Notes:

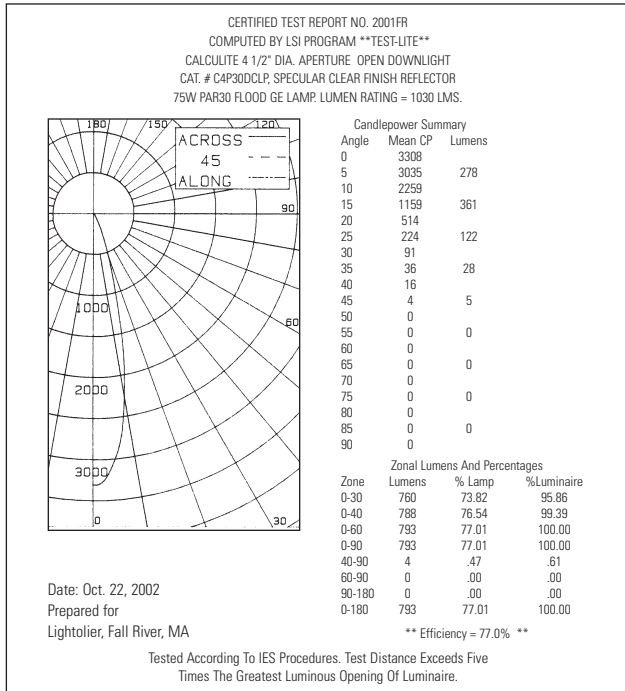

		% Effective Ceiling Cavity Reflectance																			
		80			70			50			30			10			0				
Room Cavity Ratio	.70	% Wall Reflectance																			
		50		30		10		50		30		10		50		30		10		0	
		0	.92	.92	.92	.90	.90	.90	.86	.86	.86	.82	.82	.82	.79	.79	.79	.77	.77	.77	.77
		1	.88	.87	.86	.87	.85	.84	.83	.82	.82	.80	.80	.79	.78	.77	.77	.76	.76	.76	.76
		2	.85	.83	.81	.83	.82	.80	.81	.80	.79	.79	.78	.77	.77	.76	.75	.75	.75	.75	.75
		3	.82	.80	.78	.81	.79	.78	.79	.78	.77	.78	.77	.75	.76	.75	.74	.74	.74	.74	.73
		4	.80	.78	.76	.79	.77	.75	.78	.76	.74	.76	.75	.74	.75	.74	.73	.73	.73	.73	.72
		5	.78	.75	.73	.77	.75	.73	.76	.74	.72	.75	.73	.72	.74	.72	.71	.71	.71	.71	.71
		6	.76	.73	.72	.76	.73	.71	.75	.73	.71	.74	.72	.71	.73	.71	.70	.70	.70	.70	.70
		7	.74	.72	.70	.74	.72	.70	.73	.71	.69	.72	.70	.69	.72	.70	.69	.69	.69	.69	.68
8	.72	.70	.68	.72	.70	.68	.71	.69	.68	.71	.69	.68	.70	.69	.68	.68	.68	.68	.67		
9	.71	.69	.67	.71	.69	.67	.70	.68	.67	.70	.68	.66	.69	.67	.66	.66	.66	.66	.66		
10	.70	.67	.65	.69	.67	.65	.69	.67	.65	.68	.66	.65	.68	.66	.65	.65	.65	.65	.64		

20% Floor Cavity Reflectance

Job Information **Type:**

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 www.lightolier.com © 2008 Philips Group • A0508