

Ordering Information

Catalog No.	Finish	Track Mountings	Lamps
FXESRN	Silver	For use on all Tangent Track systems. May be horizontal or vertical wall mounted.	120V MR16 Halogen GU10 Base 50W Max

Features

- Track Attachment fitting:** Molded thermoplastic clamping adapter with captive, nickel-plated steel pin. Clockwise rotation of pin secures fixture adapter to track.
- Fixture Stem:** Two 1/8" diameter stainless steel rods.
- Horizontal Pivot:** 365° horizontal rotation.
- Vertical Pivot:** 0° to 90° vertical adjustment.
- Socket:** Ceramic GU10 TAL halogen socket.
- Housing:** Die cast.
- Softening Lens:** Low-iron sodalime glass lens with Solite stippled pattern. Diffuses striations and shadows from lamp while allowing 92% light transmission.
- Die Cast Ring**

Finish

All Painted finishes are baked enamel.

Accessories

Accessory Holder: Integral

Accessories: Accepts one accessory lens; replaces clear glass shield provided with fixture.

Lens: AF2 or ADF2 Series

Louver: AL2HC

Labels

cULus Listed

Dimming

Fixture may be used on a track with a dimmer. Consult dimmer manufacturer for correct dimmer selection.

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Notes:


631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2009 Philips Group • B0509

AIMING ANGLE:

- L** Beam length
- W** Beam Width
- C** Distance to center beam
- D** Distance
- A** Aiming Angle
- FC** Footcandles

L and **W** are the outer points where the candle power drops to 50% of the maximum. **FC** are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance. CBCP= Center Beam Candle Power.

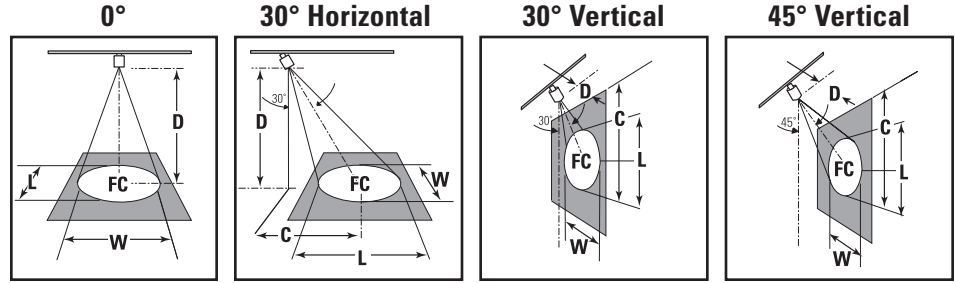

LAMP

LAMP	Beam Spread (To 50% CBCP)	CBCP	Rated Life (Hrs.)	0°					30° Horizontal					30° Vertical					45° Vertical				
				D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W
50W Philips GU10	25°	700	3000	6'	0.0'	19	2.7'	2.7'	8'	4.6'	7	4.8'	4.1'	3'	5.2'	10	6.2'	2.7'	4'	4.0'	15	3.7'	2.5'
				18'	0.0'	11	3.5'	3.5'	10'	5.8'	5	6.0'	1.7'	4'	6.9'	5	8.3'	3.5'	5'	5.0'	10	4.7'	3.1'
				10'	0.0'	7	4.4'	4.4'	12'	6.9'	3	6.0'	5.1'	5'	8.7'	4	10.4'	4.4'	6'	6.0'	7	5.6'	3.8'
				12'	0.0'	5	5.3'	5.3'	14'	8.1'	2	8.4'	7.2'	6'	10.4'	2	12.5'	5.3'	7'	7.0'	5	6.5'	4.4'
50W Sylvania PAR16 GU10	40°	640	1,000	6'	0.0'	18	4.4'	4.4'	6'	3.5'	12	6.1'	5.0'	2'	3.5'	20	9.7'	2.9'	2'	2.0'	57	3.4'	2.1'
				8'	0.0'	10	5.8'	5.8'	8'	4.6'	6	8.1'	6.7'	3'	5.2'	9	14.5'	4.4'	3'	3.0'	25	5.0'	3.1'
				10'	0.0'	6	7.3'	7.3'	10'	5.8'	4	10.2'	8.4'	4'	6.9'	5	19.3'	5.8'	4'	4.0'	14	6.7'	4.1'
				12'	0.0'	4	8.7'	8.7'	12'	6.9'	3	12.2'	10.1'	5'	8.7'	3	24.2'	7.3'	5'	5.0'	9	8.4'	5.1'

Job Information **Type:**

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 www.lightolier.com © 2009 Philips Group • B0509