

Ordering Information

Catalog No.	Description	Mounting
LLA01RNF	Narrow Flood Reflector	For use with Alcyon LED Small Cylinder LLA01.
LLA01RNF SOL	Narrow Flood Reflector with Solite Lens	Ordered Separately.

Features

1. **Narrow Flood Reflector:** Aluminum, faceted, specular, anodized and sealed.

Finish

Specular Anodized and Sealed.

Labels

c.UL

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	


Aiming Angle:

L Beam length
W Beam Width
C Distance to center beam
D Distance
A Aiming Angle
FC Footcandles

L and **W** are the outer points where the candle power drops to 50% of the maximum. **FC** are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance.

CBCP = Center Beam Candle Power.

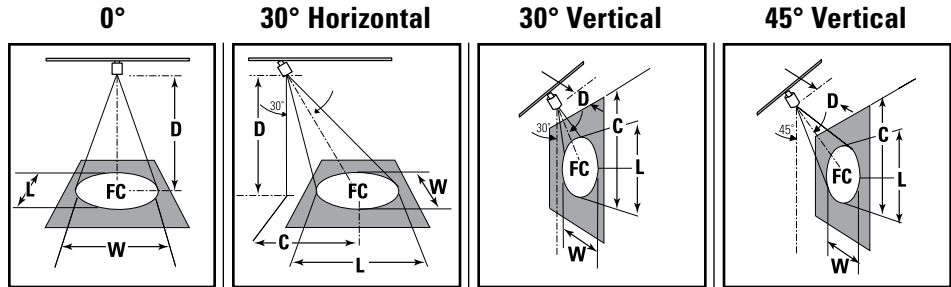

	Beam Spread (To 50% CBCP)	CBCP	Rated Life (Hrs.)	0°				30° Horizontal					30° Vertical					45° Vertical				
				D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W
LLA01 w/Solite Lens		1,757	50,000	5'	70	3.2	3.2	5	2.9	46	4.5	3.8	2	3.5	55	7.6	2.6	2	2.0	155	2.9	1.8
				6'	49	3.9	3.9	6	3.5	32	5.4	4.5	3	5.2	24	11.4	3.9	3	3.0	69	4.4	2.8
				7'	36	4.5	4.5	7	4.0	23	6.3	5.3	4	6.9	14	15.2	5.2	4	4.0	39	5.8	3.7
				8'	27	5.2	5.2	8	4.6	18	7.2	6.0	6	10.4	6	22.8	7.8	6	6.0	17	8.7	5.5
LLA01 w/Clear Lens		2,201	50,000	5'	88	2.7'	2.7'	5'	2.9'	57	3.7'	3.1'	2'	3.5'	69	5.5'	2.1'	2'	2.0'	195	2.3'	1.5'
				6'	61	3.2'	3.2'	6'	3.5'	40	4.4'	3.7'	3'	5.2'	31	8.2'	3.2'	3'	3.0'	86	3.5'	2.3'
				7'	45	3.8'	3.8'	7'	4.0'	29	5.1'	4.3'	4'	6.9'	17	10.9'	4.3'	4'	4.0'	49	4.6'	3.0'
				8'	34	4.3'	4.3'	8'	4.6'	22	5.9'	5.0'	6'	10.4'	8	16.4'	6.4'	6'	6.0'	22	6.9'	4.5'

Job Information **Type:**