

Ordering Information

Catalog No.	Description	Mounting
LLA11RF	Alcyon LED Medium Cylinder Flood Reflector	For use with Alcyon LED Med Cylinder LLA11. Ordered Separately.
LLA11RFSOL	Alcyon LED Medium Cylinder Flood Reflector with Solite lens	

Features

- 1. **Flood Reflector:** Aluminum, faceted, specular, anodized and sealed.

Finish

Specular Anodized and Sealed.

Labels

c.UL

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	


Aiming Angle:

L Beam length
W Beam Width
C Distance to center beam
D Distance
A Aiming Angle
FC Footcandles

L and **W** are the outer points where the candle power drops to 50% of the maximum. **FC** are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance.

CBCP = Center Beam Candle Power.

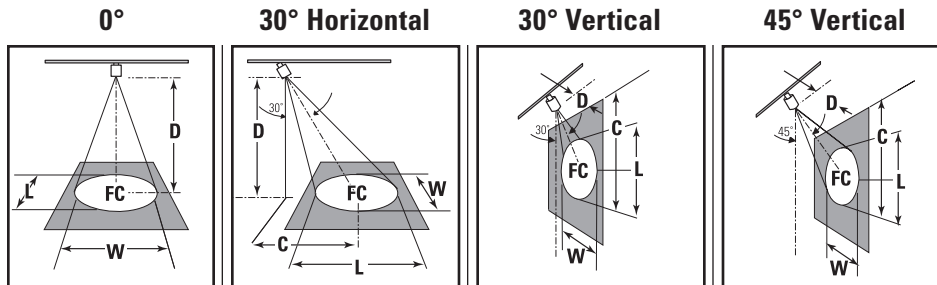

	Beam Spread (To 50% CBCP)	CBCP	Rated Life (Hrs.)	0°				30° Horizontal				30° Vertical				45° Vertical						
				D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W
LLA11 w/Solite Lens		1,845	50,000	5'	74	3.2'	3.2'	5'	2.9'	48	4.5'	3.8'	2'	2.6'	103	5.7'	1.9'	2'	2.0'	163	2.9'	1.8'
				6'	51	3.9'	3.9'	6'	3.5'	33	5.4'	4.5'	2'	3.5'	58	7.6'	2.6'	3'	3.0'	72	4.4'	2.8'
				7'	38	4.5'	4.5'	7'	4.0'	24	6.3'	5.3'	3'	5.2'	26	11.4'	3.9'	4'	4.0'	41	5.8'	3.7'
				8'	29	5.2'	5.2'	8'	4.6'	19	7.2'	6.0'	4'	6.9'	14	15.2'	5.2'	6'	6.0'	18	8.7'	5.5'
LLA11 w/Clear Lens		2,044	50,000	6'	57	3.7'	3.7'	6'	3.5'	37	5.0'	4.2'	2'	2.6'	114	5.1'	1.8'	2'	2.0'	181	2.7'	1.7'
				7'	42	4.3'	4.3'	7'	4.0'	27	5.9'	4.9'	2'	3.5'	64	6.8'	2.4'	3'	3.0'	80	4.0'	2.6'
				8'	32	4.9'	4.9'	8'	4.6'	21	6.7'	5.6'	3'	5.2'	28	10.2'	3.7'	4'	4.0'	45	5.4'	3.5'
				9'	25	5.5'	5.5'	9'	5.2'	16	7.6'	6.4'	4'	6.9'	16	13.6'	4.9'	6'	6.0'	20	8.1'	5.2'

Job Information **Type:**