

**Ordering Information**

Catalog No.	Finish	Description	Mounting
LLA11RNF	Black	Alcyon LED Medium Cylinder Flood Reflector	For use with Alcyon LED Medium Cylinder LLA11.
LLA11RNF SOL	White	Alcyon LED Medium Cylinder Narrow Flood Reflector with Solit lens	

**Features**

- 1. **Narrow Flood Reflector:** Aluminum, faceted, specular, anodized and sealed.

**Finish**

**Specular Anodized and Sealed.**

**Labels**

Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	


**Aiming Angle:**

**L** Beam length                      **D** Distance  
**W** Beam Width                      **A** Aiming Angle  
**C** Distance to center beam      **FC** Footcandles

**L** and **W** are the outer points where the candle power drops to 50% of the maximum. **FC** are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance.

CBCP = Center Beam Candle Power.

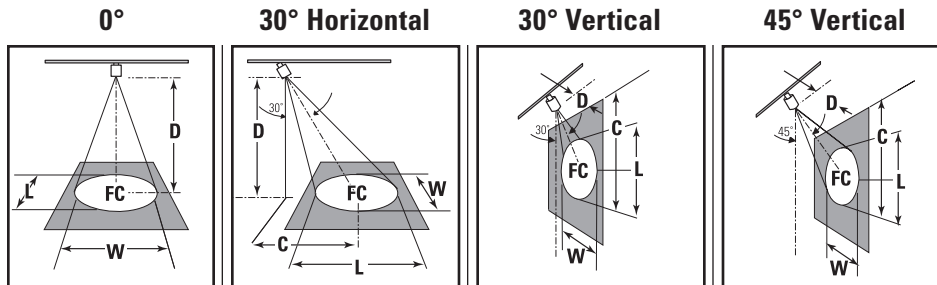

	Beam Spread (To 50% CBCP)	CBCP	Rated Life (Hrs.)	0°				30° Horizontal					30° Vertical					45° Vertical				
				D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W
LLA11 w/Solite Lens	28°	2,752	50,000	5'	110	2.5'	2.5'	5'	2.9'	71	3.4'	2.9'	2'	3.5'	86	4.9'	2.0'	2'	2.0'	243	2.1'	1.4'
				6'	76	3.0'	3.0'	6'	3.5'	50	4.1'	3.5'	3'	5.2'	38	7.4'	3.0'	3'	3.0'	108	3.2'	2.1'
				7'	56	3.5'	3.5'	7'	4.0'	36	4.8'	4.0'	4'	6.9'	22	9.8'	4.0'	4'	4.0'	61	4.3'	2.8'
				8'	43	4.0'	4.0'	8'	4.6'	28	5.4'	4.6'	6'	10.4'	10	14.7'	6.0'	6'	6.0'	27	6.4'	4.2'
LLA11 w/Clear Lens	24°	3,862	50,000	6'	107	2.6'	2.6'	6'	3.5'	70	3.5'	2.9'	2'	3.5'	121	3.9'	1.7'	2'	2.0'	341	1.8'	1.2'
				7'	79	3.0'	3.0'	7'	4.0'	51	4.0'	3.4'	3'	5.2'	54	5.9'	2.6'	3'	3.0'	152	2.7'	1.8'
				8'	60	3.4'	3.4'	8'	4.6'	39	4.6'	3.9'	4'	6.9'	30	7.9'	3.4'	4'	4.0'	85	3.6'	2.4'
				9'	48	3.8'	3.8'	9'	5.2'	31	5.2'	4.4'	6'	10.4'	13	11.8'	5.1'	6'	6.0'	38	5.3'	3.6'

**Job Information** Type: