

SLB Surface Box 2' x 4' Fluorescent **SLB2SFVA432**

Page 1 of 2




Flat Steel or Regressed Aluminum Frame, 2, 3, or 4 Lamp T8 or T12

Features




- Shallow 4" deep body.
- Positive cam-action latches frame on either side.
- Efficiency 67.1% (4 T8).
- Center mounted ballast compartment (2 or 4 lamps).
- Snap-on wiring channel cover removed without tools.
- Matte black light seal on both sides to prevent light leaks.
- Spot welded one-piece construction.



Mounting Methods



Dimensions

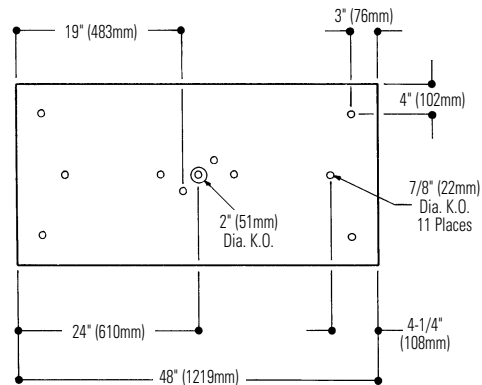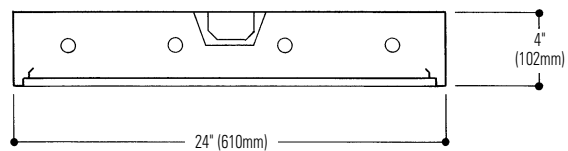

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Volts/Ballast:

Lightolier a Genlyte Thomas Company

www.lightolier.com

Technical Information: (978) 657-7600 • Fax (978) 658-0595

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710

We reserve the right to change details of design, materials and finish.

Copyright 2002 Lightolier

Section 3A/Folio H70-12

LIGHTOLIER[®]




SLB Surface Box 2' x 4' Fluorescent **SLB2SFSVA432**

Page 2 of 2

Flat Steel or Regressed Aluminum Frame, 2, 3, or 4 Lamp T8 or T12

Photometry

Model No. SLB2SFSVA43212004

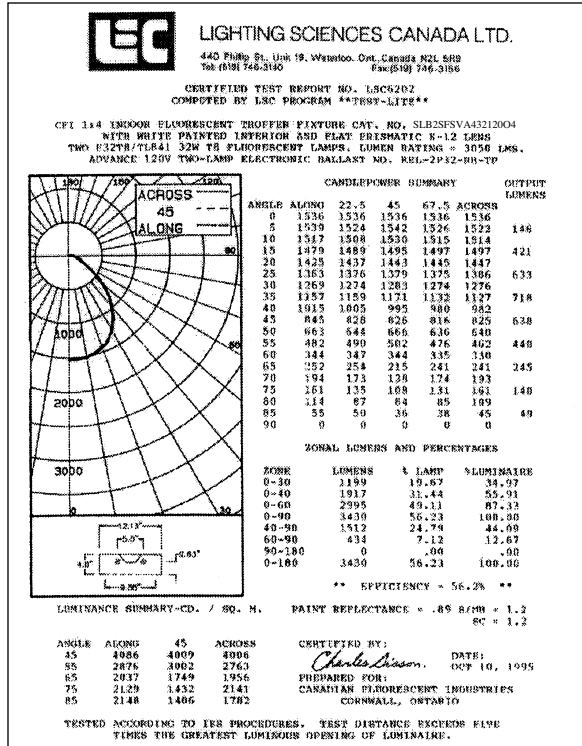

coefficients of utilization — zonal cavity method

	RF	20			20			20		
	RC	80			50			30		
	RW	70	50	30	50	30	10	50	30	10
room cavity ratio	1	74	71	69	67	65	64	64	63	62
	2	68	64	60	60	57	55	58	56	53
	3	63	57	52	54	51	47	52	49	47
	4	58	51	46	49	45	41	47	44	41
	5	54	46	40	44	39	36	43	39	35
	6	50	41	36	40	35	32	39	34	31
	7	46	37	32	36	31	28	35	31	27
	8	42	34	30	32	28	24	32	27	24
	9	39	30	25	29	24	21	28	24	21
	10	36	28	22	26	22	19	26	22	19

Ordering Information

Explanation of Catalog Number. Example: SLB2SFSVA43212004

SL	B	2	S		VA					
SLB Surface: Lens Frame Surface Fluorescent	Body Style: Surface Box	Fixture Width	Ceiling Type: S = Surface	Lens Frame: FS = Flush full- size steel frame RA = Regressed flush full- size aluminum frame	Lens Shielding Type: VA = Pattern 12 lens, .095" nominal pris- matic lens (standard). see options and consult factory.	Lamp Quantity: 2 = 2 Lamp 3 = 3 Lamp 4 = 4 Lamp	Lamp/Fixture Length: 32 = T8 34 = T12 (Nominal 48")	Voltage: 120 or 277	Ballast Type: 1 & 2 Lamp Mag. T12 LE <20THD <10THD 1 & 2 Lamp Elec. T8 S0* H1* 1-3 Lamp Elec. T8 O3* H3* 1-4 Lamp Elec. T8 O4* H4* LOL Dimming T8 PS *Instant Start Standard Other dimming options. Consult factory.	Options: Add appropriate suffix to catalog no. ie: (GLR)

Options & Accessories

Fusing: Internal fast-blow fusing. Suffix: **GLR**.

Internal slow-blow fusing. Suffix: **GMF**.

Electrical/Wiring Options: Consult factory.

Radio Interference Filter: 120 or 277 volt, 50 or 60 Hz. One per fixture.

Suffix: **R**. One per ballast, Suffix: **B**.

Stem and Canopy Sets: Suspends fixture 6", 12" 18" or 24" from surface. (Four per fixture is recommended. Catalog Number: **ASC6 CSP** (6"), **ASC12 CSP** (12"), **ASC18 CSP** (18"), **ASC24 CSP** (24").

Specifications

Performance: In an installation of 4 lamp 32W luminaires in a room cavity ratio of 1, with a reflectance of 80% ceiling, 50% wall, 20% floor, the C.U. shall not be less than .60. To prevent glare the average brightness at 65° shall not exceed 2457 candelas per square meter. To control veiling reflections, luminaire output in the 30-90° zone shall be not less than 68%.

Materials: Chassis parts are die-formed 20 gauge cold rolled steel.

Finish: White baked polyester powder coat.

Electrical: Thermally protected class "P" ballast C.B.M. approved, non PCB. If K.O. is within 3" of ballast, use wire suitable for at least 90°.

Labels: I.B.E.W./UL and C-UL.

Job Information

Type:

Lightolier a Genlyte Thomas Company www.lightolier.com
 Technical Information: (978) 657-7600 • Fax (978) 658-0595
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 Copyright 2002 Lightolier **Section 3A/Folio H70-12**

LIGHTOLIER