


# Narrow T5 Strip **SV T5 Strip**







## Features

- Only 2" wide.
- Utilizes compact, high efficiency, T5 or T5HO lamps.
- Fully enclosed wiring.
- Optional white or specular, symmetric and assymetric reflector.
- Convenience outlet and switch K.O.s provided
- Push through lamp holders with rotor for secure lamp retention.
- Optional hangers and wires guards.

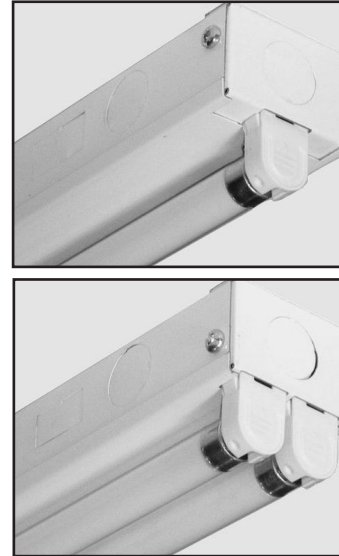


## Dimensions

A: 9/16"(14mm) K.O.  
 B: 7/8"(22mm) K.O.  
 C: CARRIAGE SLOT

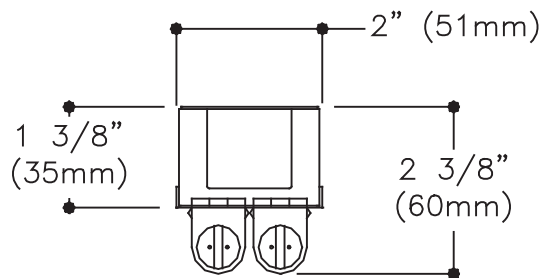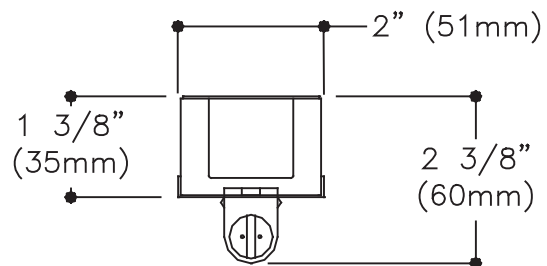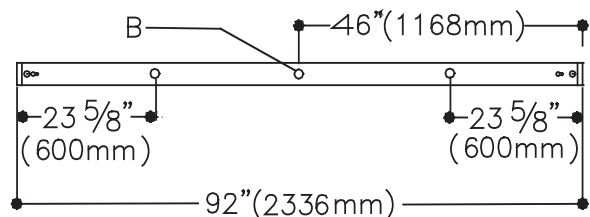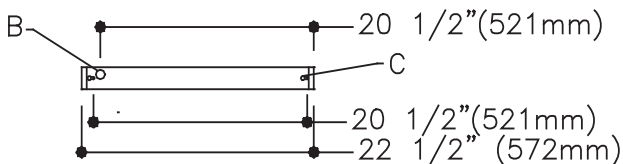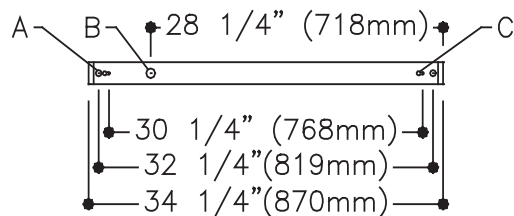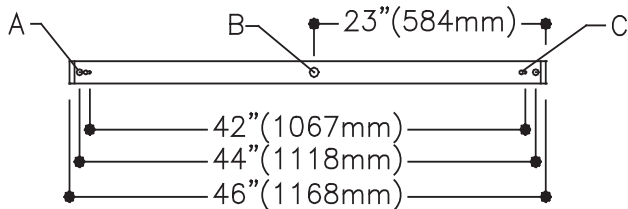

Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Volts/Ballast:</b>	



Lightolier a Genlyte Thomas Company [www.lightolier.com](http://www.lightolier.com)  
 Technical Information: (978) 657-7600 • Fax (978) 658-0595  
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 Copyright 2002 Lightolier **Section 3A/Folio H120-17**



# Narrow T5 Strip **SV T5 Strip**


## Photometry

Model No. SV4S228120PG

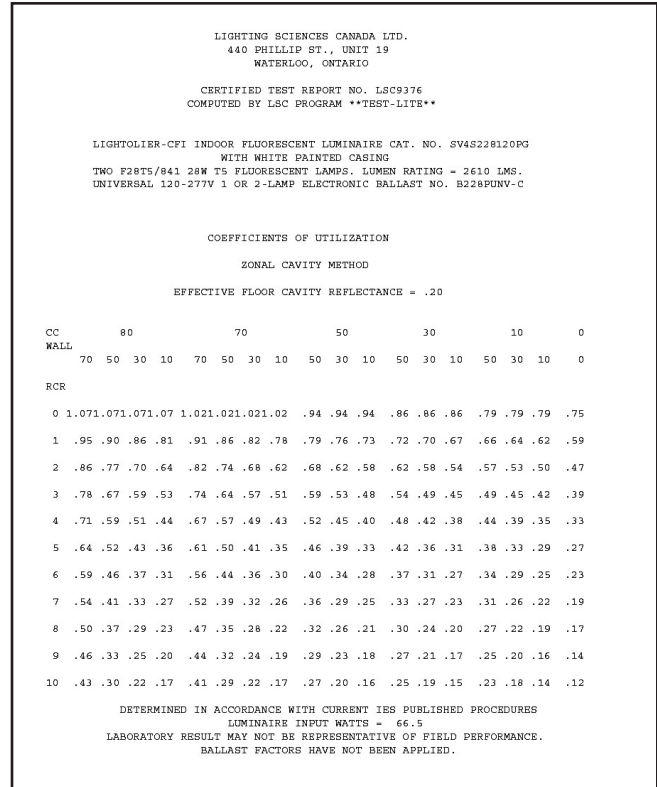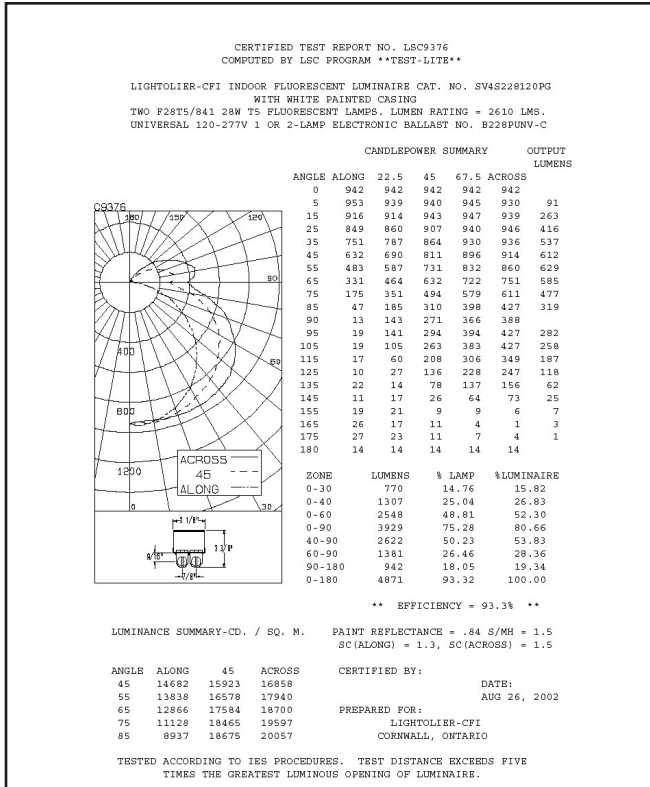

## Ordering Information

Explanation of Catalog Number. Example: SV4S228120PG

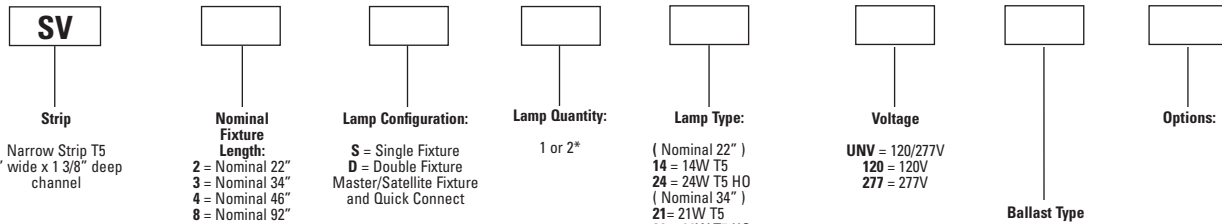

\* 92" Fixture have Lamps in tandem  
ie 1 = 1 Lamp in tandem (2 Lamps total)  
2 = 2 Lamp in tandem (4 Lamps total)

## Options & Accessories

**Stem and Canopy Sets:** Suspend luminaire 12", 18", 24", 36", or 48" from surface. (Two per luminaire is recommended. For 34" and 46" SV Strip only.) Catalog number: **SV5F12** (12"); **SV5F18** (18"); **SV5F24** (24"); **SV5F36** (36"); **SV5F48** (48").

**Chain Hanging Kit:** Includes two 5' heavy duty link chains with sturdy "V" hook for fixture suspension. (34" and 46" Strip only.) Catalog number: **EE9HC**

**Wire Guard:** White wire guard. Catalog number: For SV Strip T5 34"; **SV5GXW3**. For SV Strip T5 46"; **SV5GXW4**.

**Reflector:** Consult specification sheet (folio H120-22 & H120-20).

**Radio Interference Filter:** 120, 277 or UNV volt, 50 or 60 Hz. Suffix: **R**

**Ballast Options:** For other ballast options, consult factory

## Specifications

**Materials:** Chassis parts are die-formed heavy gauge cold rolled steel, 1-3/8" deep x 2" channel width.

## Specifications (continued)

**Finish:** Chassis exterior - phosphate undercoating, baked white acrylic matte high reflectance paint finish.

**Electrical:** HPF, thermally protected class "P" ballast. If K.O.s are within 3" of ballast use wire suitable for at least 90°.

**Labels:** Listed by



## Job Information

Type:

Lightolier a Genlyte Thomas Company www.lightolier.com  
Technical Information: (978) 657-7600 • Fax (978) 658-0595  
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
We reserve the right to change details of design, materials and finish.  
Copyright 2002 Lightolier **Section 3A/Folio H120-17**

**LIGHTOLIER®**