

Ordering Information

Catalog No.	Finish	Lamp	For Use With Luminaires
MHT6RS	Anodized	T-6 Single Ended Ceramic Metal Halide	8304 and 8314
MHT6RSCCZ	Champagne Bronze		23S70T6 and 23S39T6
MHT6RSWRM	Incandescent Warm		8121 and 8122

Features

1. Spot Reflector: Aluminum, faceted, specular, anodized and sealed.

Finish

Specular Anodized and Sealed.

Labels

UL, cUL

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

Lytespan Track Lighting System **MHT6RS**


AIMING ANGLE:

- L** Beam Length
- W** Beam Width
- C** Distance to center beam

- D** Distance
- A** Aiming Angle
- FC** Footcandles

L and **W** are the outer points where the candle power drops to 50% of the maximum. **FC** are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance.

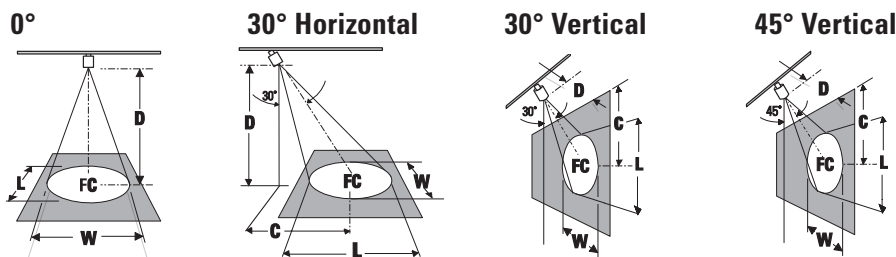

AIMING ANGLE:

	Beam Spread (To 50% CBCP)	CBCP	Rated Life (Hrs.)	0° Horizontal Aiming				30° Horizontal Aiming					30° Vertical Aiming					45° Vertical Aiming				
				D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W
39W T6 CMH		28,105	9,000 to 12,000	10'	281	1.7'	1.7'	8'	4.6'	285	1.9'	1.6'	4'	6.9'	220	2.9'	1.4'	6'	6.0'	276	2.1'	1.5'
				15'	125	2.6'	2.6'	12'	6.9'	127	2.8'	2.4'	6'	10.4'	98	4.3'	2.1'	9'	9.0'	123	3.2'	2.2'
				20'	70	3.5'	3.5'	16'	9.2'	71	3.7'	3.2'	8'	13.9'	55	5.7'	2.8'	12'	12.0'	69	4.2'	3.0'
				25'	45	4.4'	4.4'	20'	11.5'	46	4.7'	4.0'	10'	17.3'	35	7.2'	3.5'	15'	15.0'	44	5.3'	3.7'
70W T6 CMH		52,142	9,000 to 15,000	15'	232	2.6'	2.6'	10'	5.8'	339	2.3'	2.0'	6'	10.4'	181	4.3'	2.1'	8'	8.0'	288	2.8'	2.0'
				20'	130	3.5'	3.5'	15'	8.7'	151	3.5'	3.0'	8'	13.9'	102	5.7'	2.8'	12'	12.0'	128	4.2'	3.0'
				25'	83	4.4'	4.4'	20'	11.5'	85	4.7'	4.0'	10'	17.3'	65	7.2'	3.5'	14'	14.0'	94	4.9'	3.5'
				30'	58	5.2'	5.2'	25'	14.4'	54	5.8'	5.1'	12'	20.8'	45	8.6'	4.2'	16'	16.0'	72	5.6'	4.0'

Note: For Champagne Bronze (CCZ), multiply FC values by 0.64. CCZ Champagne Bronze reflector "warms" the beam to 2700K.
For WRM, multiply FC values by 0.85.

Job Information **Type:**